Results Report for

AI_DataCenter_100MW_XENDEE



POWERED BY: XENDEE

Prepared by **Jamiu Dahunsi**

Created on **Thursday, November 5, 2026**

Table of Contents

Executive Summary **4**

Overview of Results **5**

Summary **6**

- Omitted Technologies 6
- Value Streams 6
- Annualized System Costs 6
- Costs and Savings Projection (Non-Discounted) 7

Financial Data **8**

- Microgrid Cost Breakdown 8
- ROI 8
- Cash Accrued 9
- Detailed Cash Flow: Cost 10
- Detailed Cash Flow: Savings 13

Utility Data **17**

- Monthly Demand 17
- Monthly Energy Consumption 18
- Monthly Utility Charge Breakdown 18
- Utility Billing Period 19

Energy Balance and Technology Investments **20**

- Annual Electricity Balance 20
- Utility Balance 20
- Aggregated Demand 21
- CO2 Emissions 21
- Generation Technologies 21
- Investments 22
- Annual PV Electricity Balance 22
- CAPEX Breakdown 22
- Space Used 23

Electricity Dispatch **24**

Operation Summary **25**

- Generator Operation 25

Generator Run Hours 25
Monthly On-Site Generation 26
Monthly Emissions Summary 26
Technology Capacity Factor 27

11.23%
Internal Rate of Return

XENDEE

Model Input

AI_DataCenter_100MW_CFE
Lagos, Nigeria

Objectives

Minimize cost; Ride-through outage.

Financing

Interest Rate	**0.00 %**
Investment Tax Credit	**No**
MACRS	**No**

Energy Costs

Energy Price	**$0.15 / kWh**
Avg. Natural Gas Cost	**N/A**
Avg. Diesel Fuel Cost	**$1.3 / liter**
Reference LCOE	**$0.15 / kWh**

Demand Charges

Peak TOU Rate	**N/A**
Non-Coincident	**N/A**

Demand Characteristics

Peak Demand	**20 MW**
Annual Consumption	**142.5 GWh**
Schedulable EV	**N/A**

Financial Indicators for Investment

$-7,347,030	**$12.3M**	**8 Years**
Project NPV (at year 10)	Project NPV (at year 20)	Payback Period

Impact

$48M	**5.8%**	**38%**
Upfront Capital Cost	Annual Cost Reductions	Emission Savings

	Total Annual System Costs (dollars in thousands)	Total Annual CO_2 Emissions (metric tons)
Reference	$21,370.5	73,451
Investment scenario (incl. annualized capital costs and electricity sales)	$20,120.5	45,544
Total Savings (%) (incl. annualized capital costs and electricity sales)	5.8 %	38.0 %

Result	Value
Generation-Based Levelized Cost of Electricity ($ / kWh)	*optimized*: $0.1412 / kWh *reference*: $0.1500 / kWh
Load-Served Levelized Cost of Electricity ($ / kWh)	*optimized*: $0.1412 / kWh *reference*: $0.1500 / kWh
Opex Savings (%)	31.3251%
Break-Even Year	8 years
Payback Year	8 years
IRR at End of Project (%)	11.23%
NPV at End of Project	$12,273k

Type	Total New Capacity	Technology (New Capacity)	Init. Equip. Cost
	41.4 MW	Solar PV (41.4 MW)	38,336 k$
	17.5 MW	Diesel Generator (17.5 MW) (7 units)	9,625 k$
			Total Cost: 47,961 k$

This optimization meets the following resiliency criteria:

The supplied load will ride-through the following electric utility outage(s):

- From **May 12 12:00 AM** through **May 12 11:59 PM**


Summary


Provided in this section is an overview of projected annual costs and savings over a twenty-year period. Annualized System Costs summarizes the annualized operational and investment costs of the optimized microgrid, and the Costs and Savings Projection (Non-Discounted) presents costs as upfront investment capital, yearly operational expenses, and accumulated savings based on results from the year optimized.

Omitted Technologies


Type	Omitted Technology, Unit Size
	Battery Energy Storage System, N/A

Value Streams

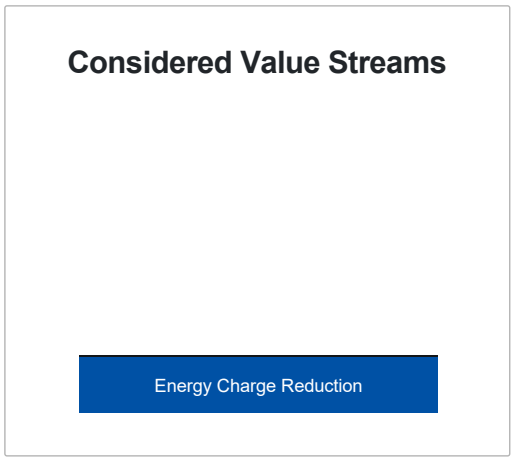

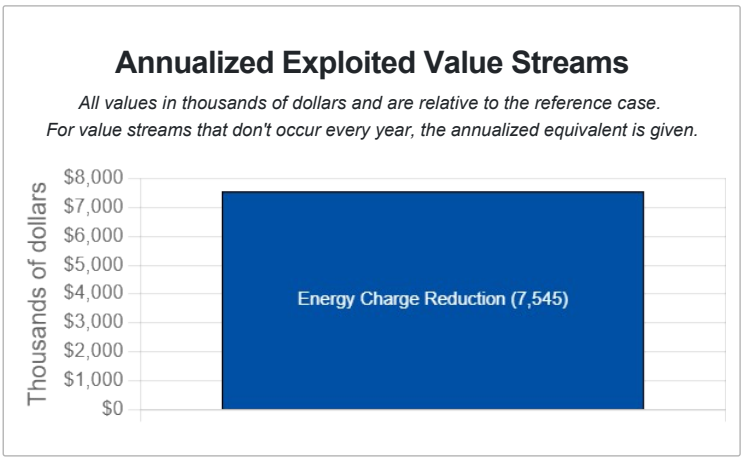


Annualized System Costs

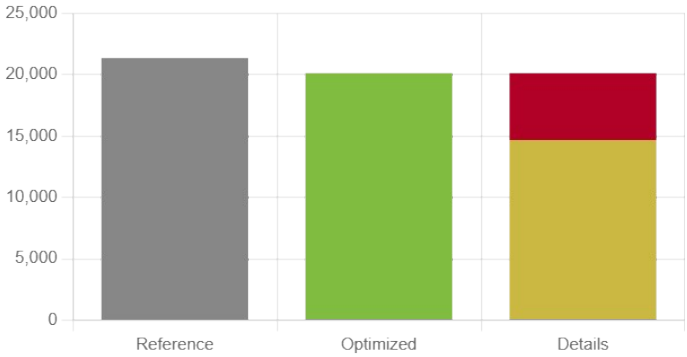

Reference	$21,371
Optimized - Total	$20,121
OPEX	$14,676
Annualized Investment Costs	$5,444

Costs and Savings Projection (Non-Discounted)

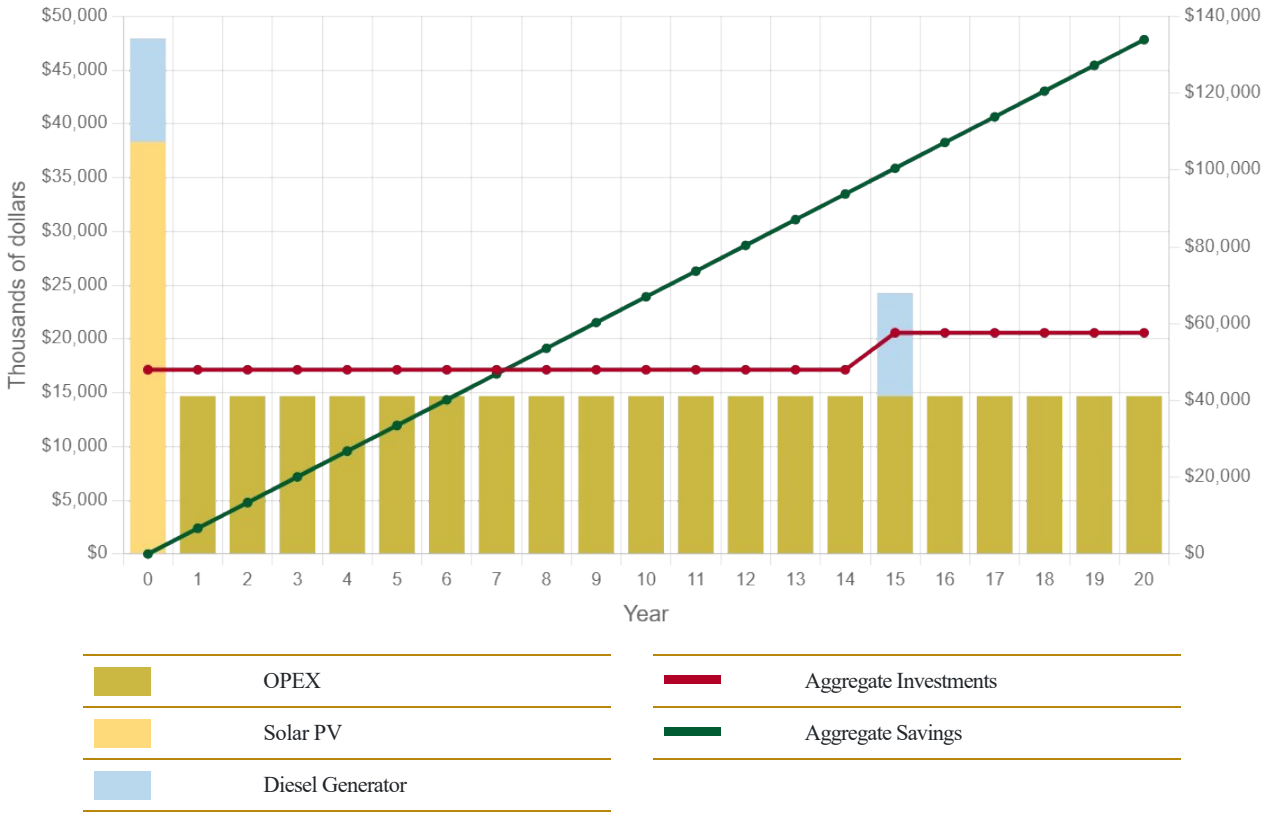


This is a non-discounted projection of the project costs and savings that assumes no changes in operation over time. Use the multi-year optimization feature to examine changes in investment and savings over time.

Note that incentives and grant funding are not included in this chart. Additionally, CAPEX are presented as the total investment costs in the year(s) corresponding to installation and/or replacement. Therefore, depending on the financing method and incentives modeled, the year when Aggregate Savings exceeds Aggregate Investments in the Costs and Savings Projection is not expected to line up with the Payback Period in the Detailed Cashflow Table.


Financial Data

Primary financial indicators are provided in this section to facilitate assessing project returns. Return on investment (ROI), Net Present Value (NPV), and Internal Rate of Return (IRR) are calculated and graphed for each year leading out to twenty years from project implementation, providing insight on returns at different timelines. Also included is a detailed cash flow table.


Microgrid Cost Breakdown

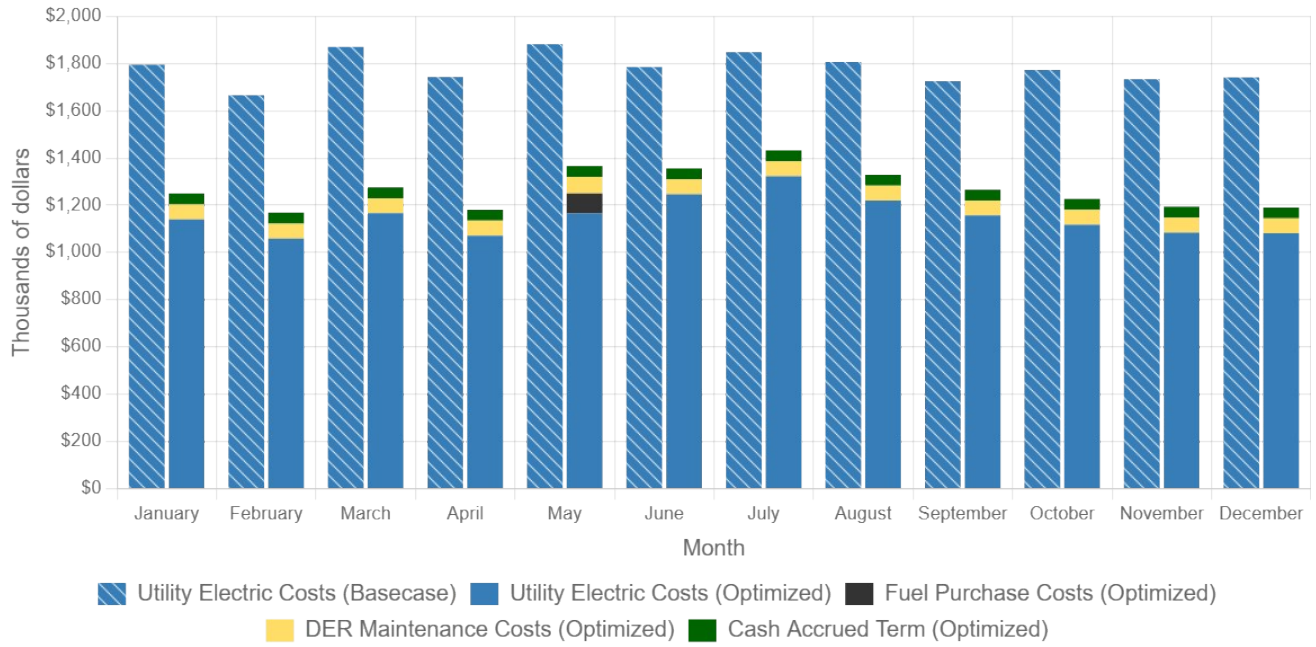

ROI

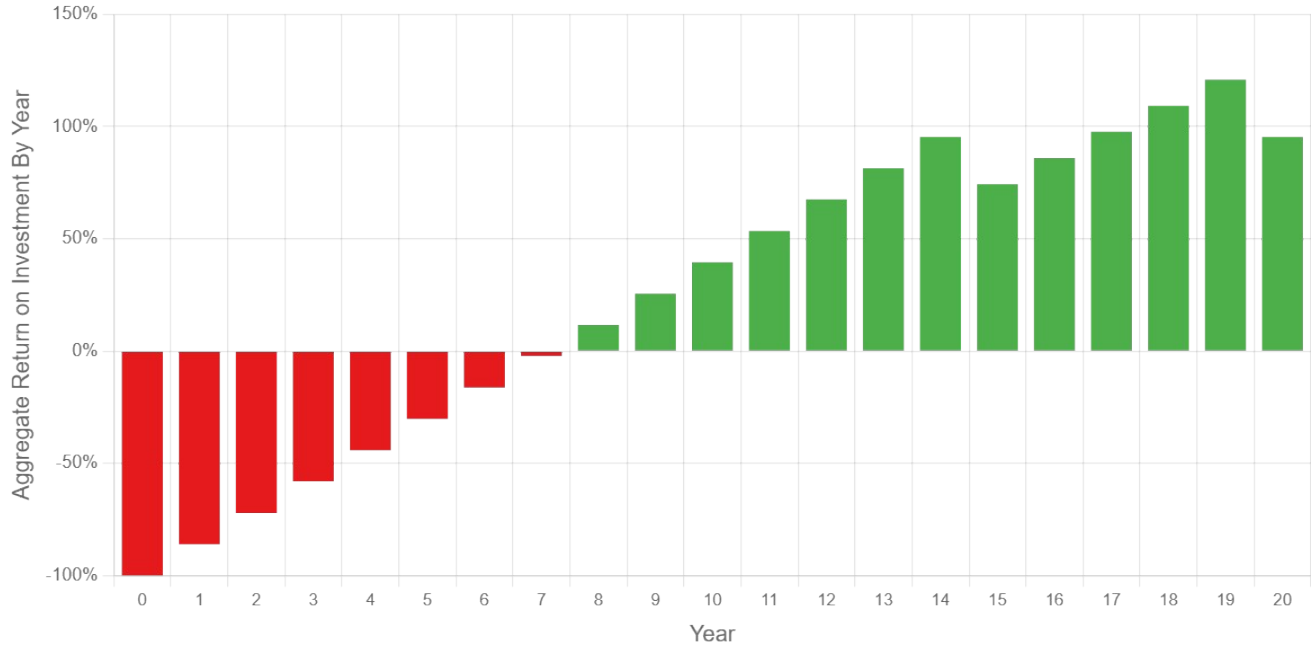

Cash Accrued

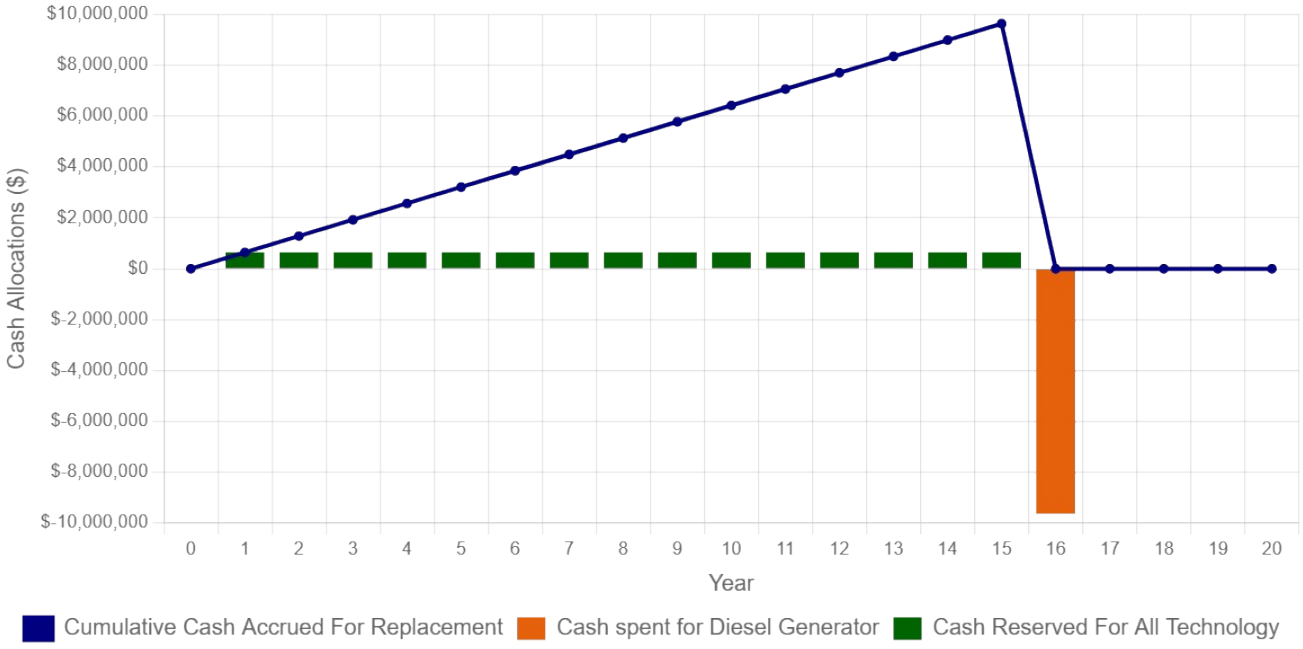

Detailed Cash Flow: Cost

(thousands of dollars)

The cost cashflow table below displays the **costs to run the system,** not relative to any reference. The lines shown are the costs that the solution is subject to. A positive value is a revenue while a negative is a cost. The sum of the individual cost terms is used to calculate the system **net present costs.**

	Year 0	Year 1	Year 2	Year 3	Year 4	Year 5
Utility Energy Charges	0.0	-13,825.1	-13,825.1	-13,825.1	-13,825.1	-13,825.1
Fuel Purchase Costs	0.0	-84.7	-84.7	-84.7	-84.7	-84.7
DER Maintenance Costs	0.0	-766.4	-766.4	-766.4	-766.4	-766.4
Total OPEX Costs	0.0	-14,676.2	-14,676.2	-14,676.2	-14,676.2	-14,676.2
CAPEX for Solar PV	-38,336.0	0.0	0.0	0.0	0.0	0.0
CAPEX for Diesel Generator	-9,625.0	0.0	0.0	0.0	0.0	0.0
Total CAPEX costs	-47,961.0	0.0	0.0	0.0	0.0	0.0
Replacement Cost for Diesel Generator	0.0	-641.7	-641.7	-641.7	-641.7	-641.7
Total Replacement Costs	0.0	-641.7	-641.7	-641.7	-641.7	-641.7
Net Annual Cost (*Non-discounted*)	-47,961.0	-15,317.9	-15,317.9	-15,317.9	-15,317.9	-15,317.9
Net Annual Cost (*Discounted*)	-47,961.0	-14,183.2	-13,132.6	-12,159.8	-11,259.1	-10,425.1
Net Present Cost	**-47,961.0**	**-62,144.2**	**-75,276.8**	**-87,436.6**	**-98,695.7**	**-109,120.8**
Cumulative Cost (*Non-discounted*)	**-47,961.0**	**-63,278.8**	**-78,596.7**	**-93,914.6**	**-109,232.4**	**-124,550.3**
Cumulative Cost (*Discounted*)	**-47,961.0**	**-58,591.5**	**-67,384.0**	**-74,552.4**	**-80,289.1**	**-84,766.8**

	Year 6	Year 7	Year 8	Year 9	Year 10	Year 11
Utility Energy Charges	-13,825.1	-13,825.1	-13,825.1	-13,825.1	-13,825.1	-13,825.1
Fuel Purchase Costs	-84.7	-84.7	-84.7	-84.7	-84.7	-84.7
DER Maintenance Costs	-766.4	-766.4	-766.4	-766.4	-766.4	-766.4
Total OPEX Costs	-14,676.2	-14,676.2	-14,676.2	-14,676.2	-14,676.2	-14,676.2
CAPEX for Solar PV	0.0	0.0	0.0	0.0	0.0	0.0
CAPEX for Diesel Generator	0.0	0.0	0.0	0.0	0.0	0.0
Total CAPEX costs	0.0	0.0	0.0	0.0	0.0	0.0
Replacement Cost for Diesel Generator	-641.7	-641.7	-641.7	-641.7	-641.7	-641.7
Total Replacement Costs	-641.7	-641.7	-641.7	-641.7	-641.7	-641.7
Net Annual Cost (*Non-discounted*)	-15,317.9	-15,317.9	-15,317.9	-15,317.9	-15,317.9	-15,317.9
Net Annual Cost (*Discounted*)	-9,652.9	-8,937.8	-8,275.8	-7,662.8	-7,095.1	-6,569.6
Net Present Cost	**-118,773.6**	**-127,711.4**	**-135,987.2**	**-143,649.9**	**-150,745.1**	**-157,314.7**
Cumulative Cost (*Non-discounted*)	**-139,868.2**	**-155,186.0**	**-170,503.9**	**-185,821.7**	**-201,139.6**	**-216,457.5**
Cumulative Cost (*Discounted*)	**-88,140.7**	**-90,549.6**	**-92,117.9**	**-92,957.1**	**-93,166.6**	**-92,834.9**

	Year 12	Year 13	Year 14	Year 15	Year 16	Year 17
Utility Energy Charges	-13,825.1	-13,825.1	-13,825.1	-13,825.1	-13,825.1	-13,825.1
Fuel Purchase Costs	-84.7	-84.7	-84.7	-84.7	-84.7	-84.7
DER Maintenance Costs	-766.4	-766.4	-766.4	-766.4	-766.4	-766.4
Total OPEX Costs	-14,676.2	-14,676.2	-14,676.2	-14,676.2	-14,676.2	-14,676.2
CAPEX for Solar PV	0.0	0.0	0.0	0.0	0.0	0.0
CAPEX for Diesel Generator	0.0	0.0	0.0	0.0	0.0	0.0
Total CAPEX costs	0.0	0.0	0.0	0.0	0.0	0.0
Replacement Cost for Diesel Generator	-641.7	-641.7	-641.7	-641.7	0.0	0.0
Total Replacement Costs	-641.7	-641.7	-641.7	-641.7	0.0	0.0
Net Annual Cost (*Non-discounted*)	-15,317.9	-15,317.9	-15,317.9	-15,317.9	-14,676.2	-14,676.2
Net Annual Cost (*Discounted*)	-6,082.9	-5,632.4	-5,215.1	-4,828.8	-4,283.8	-3,966.5
Net Present Cost	**-163,397.6**	**-169,029.9**	**-174,245.1**	**-179,073.9**	**-183,357.7**	**-187,324.3**
Cumulative Cost (*Non-discounted*)	**-231,775.3**	**-247,093.2**	**-262,411.1**	**-277,728.9**	**-292,405.1**	**-307,081.3**
Cumulative Cost (*Discounted*)	**-92,041.2**	**-90,855.7**	**-89,340.7**	**-87,551.7**	**-85,350.3**	**-82,994.5**

	Year 18	Year 19	Year 20
Utility Energy Charges	-13,825.1	-13,825.1	-13,825.1
Fuel Purchase Costs	-84.7	-84.7	-84.7
DER Maintenance Costs	-766.4	-766.4	-766.4
Total OPEX Costs	-14,676.2	-14,676.2	-14,676.2
CAPEX for Solar PV	0.0	0.0	0.0
CAPEX for Diesel Generator	0.0	0.0	0.0
Total CAPEX costs	0.0	0.0	0.0
Replacement Cost for Diesel Generator	0.0	0.0	0.0
Total Replacement Costs	0.0	0.0	0.0
Net Annual Cost (*Non-discounted*)	-14,676.2	-14,676.2	-14,676.2
Net Annual Cost (*Discounted*)	-3,672.7	-3,400.7	-3,148.8
Net Present Cost	**-190,997.0**	**-194,397.6**	**-197,546.4**
Cumulative Cost (*Non-discounted*)	**-321,757.5**	**-336,433.7**	**-351,109.9**
Cumulative Cost (*Discounted*)	**-80,519.5**	**-77,955.8**	**-75,330.0**

Detailed Cash Flow: Savings

(thousands of dollars)

The Savings cashflow table below displays the **savings the system produces relative to the reference.** The lines shown are the savings that the solution creates. A positive value is a savings while a negative is a loss. The sum of the individual savings terms is used to calculate the **net present value** of the system.

	Year 0	Year 1	Year 2	Year 3	Year 4	Year 5
Savings: Utility Energy Charges	0.0	7,545.4	7,545.4	7,545.4	7,545.4	7,545.4
Savings: Fuel Purchase Costs	0.0	-84.7	-84.7	-84.7	-84.7	-84.7
Savings: DER Maintenance Costs	0.0	-766.4	-766.4	-766.4	-766.4	-766.4
Total OPEX Savings	0.0	6,694.3	6,694.3	6,694.3	6,694.3	6,694.3
CAPEX difference for Solar PV	-38,336.0	0.0	0.0	0.0	0.0	0.0
CAPEX difference for Diesel Generator	-9,625.0	0.0	0.0	0.0	0.0	0.0
Total CAPEX Difference	-47,961.0	0.0	0.0	0.0	0.0	0.0
Replacement Cost Difference for Diesel Generator	0.0	-641.7	-641.7	-641.7	-641.7	-641.7
Total Replacement Costs Difference	0.0	-641.7	-641.7	-641.7	-641.7	-641.7
Net Annual Cash Flow (*Non-discounted*)	-47,961.0	6,052.7	6,052.7	6,052.7	6,052.7	6,052.7
Net Annual Cash Flow (*Discounted*)	-47,961.0	5,604.3	5,189.2	4,804.8	4,448.9	4,119.4
Net Present Value	**-47,961.0**	**-42,356.6**	**-37,167.5**	**-32,362.6**	**-27,913.8**	**-23,794.4**
Cumulative Cash Flow (*Non-discounted*)	**-47,961.0**	**-41,908.3**	**-35,855.6**	**-29,803.0**	**-23,750.3**	**-17,697.6**
Cumulative Cash Flow (*Discounted*)	**-47,961.0**	**-38,804.0**	**-30,740.4**	**-23,658.5**	**-17,457.2**	**-12,044.7**

	Year 6	Year 7	Year 8	Year 9	Year 10	Year 11
Savings: Utility Energy Charges	7,545.4	7,545.4	7,545.4	7,545.4	7,545.4	7,545.4
Savings: Fuel Purchase Costs	-84.7	-84.7	-84.7	-84.7	-84.7	-84.7
Savings: DER Maintenance Costs	-766.4	-766.4	-766.4	-766.4	-766.4	-766.4
Total OPEX Savings	6,694.3	6,694.3	6,694.3	6,694.3	6,694.3	6,694.3
CAPEX difference for Solar PV	0.0	0.0	0.0	0.0	0.0	0.0
CAPEX difference for Diesel Generator	0.0	0.0	0.0	0.0	0.0	0.0
Total CAPEX Difference	0.0	0.0	0.0	0.0	0.0	0.0
Replacement Cost Difference for Diesel Generator	-641.7	-641.7	-641.7	-641.7	-641.7	-641.7
Total Replacement Costs Difference	-641.7	-641.7	-641.7	-641.7	-641.7	-641.7
Net Annual Cash Flow (*Non-discounted*)	6,052.7	6,052.7	6,052.7	6,052.7	6,052.7	6,052.7
Net Annual Cash Flow (*Discounted*)	3,814.2	3,531.7	3,270.1	3,027.8	2,803.6	2,595.9
Net Present Value	**-19,980.2**	**-16,448.5**	**-13,178.4**	**-10,150.6**	**-7,347.0**	**-4,751.1**
Cumulative Cash Flow (*Non-discounted*)	**-11,644.9**	**-5,592.3**	**460.4**	**6,513.1**	**12,565.8**	**18,618.5**
Cumulative Cash Flow (*Discounted*)	**-7,338.3**	**-3,263.0**	**248.8**	**3,258.2**	**5,820.4**	**7,985.1**

	Year 12	Year 13	Year 14	Year 15	Year 16	Year 17
Savings: Utility Energy Charges	7,545.4	7,545.4	7,545.4	7,545.4	7,545.4	7,545.4
Savings: Fuel Purchase Costs	-84.7	-84.7	-84.7	-84.7	-84.7	-84.7
Savings: DER Maintenance Costs	-766.4	-766.4	-766.4	-766.4	-766.4	-766.4
Total OPEX Savings	6,694.3	6,694.3	6,694.3	6,694.3	6,694.3	6,694.3
CAPEX difference for Solar PV	0.0	0.0	0.0	0.0	0.0	0.0
CAPEX difference for Diesel Generator	0.0	0.0	0.0	0.0	0.0	0.0
Total CAPEX Difference	0.0	0.0	0.0	0.0	0.0	0.0
Replacement Cost Difference for Diesel Generator	-641.7	-641.7	-641.7	-641.7	0.0	0.0
Total Replacement Costs Difference	-641.7	-641.7	-641.7	-641.7	0.0	0.0
Net Annual Cash Flow (*Non-discounted*)	6,052.7	6,052.7	6,052.7	6,052.7	6,694.3	6,694.3
Net Annual Cash Flow (*Discounted*)	2,403.6	2,225.6	2,060.7	1,908.1	1,954.0	1,809.3
Net Present Value	**-2,347.5**	**-122.0**	**1,938.7**	**3,846.8**	**5,800.8**	**7,610.1**
Cumulative Cash Flow (*Non-discounted*)	**24,671.1**	**30,723.8**	**36,776.5**	**42,829.2**	**49,523.5**	**56,217.8**
Cumulative Cash Flow (*Discounted*)	**9,797.2**	**11,297.1**	**12,521.0**	**13,501.5**	**14,455.4**	**15,193.9**

	Year 18	Year 19	Year 20
Savings: Utility Energy Charges	7,545.4	7,545.4	7,545.4
Savings: Fuel Purchase Costs	-84.7	-84.7	-84.7
Savings: DER Maintenance Costs	-766.4	-766.4	-766.4
Total OPEX Savings	6,694.3	6,694.3	6,694.3
CAPEX difference for Solar PV	0.0	0.0	0.0
CAPEX difference for Diesel Generator	0.0	0.0	0.0
Total CAPEX Difference	0.0	0.0	0.0
Replacement Cost Difference for Diesel Generator	0.0	0.0	0.0
Total Replacement Costs Difference	0.0	0.0	0.0
Net Annual Cash Flow (*Non-discounted*)	6,694.3	6,694.3	6,694.3
Net Annual Cash Flow (*Discounted*)	1,675.3	1,551.2	1,436.3
Net Present Value	**9,285.3**	**10,836.5**	**12,272.7**
Cumulative Cash Flow (*Non-discounted*)	**62,912.2**	**69,606.5**	**76,300.9**
Cumulative Cash Flow (*Discounted*)	**15,743.7**	**16,128.7**	**16,370.2**


Utility Data

This section provides a summary of electricity and fuel utility purchases. Monthly breakdowns of energy consumption [kWh], demand by time-of-use period [kW], and total charges [k$] are included.


Monthly Demand (kW)



Monthly Energy Consumption (kWh)

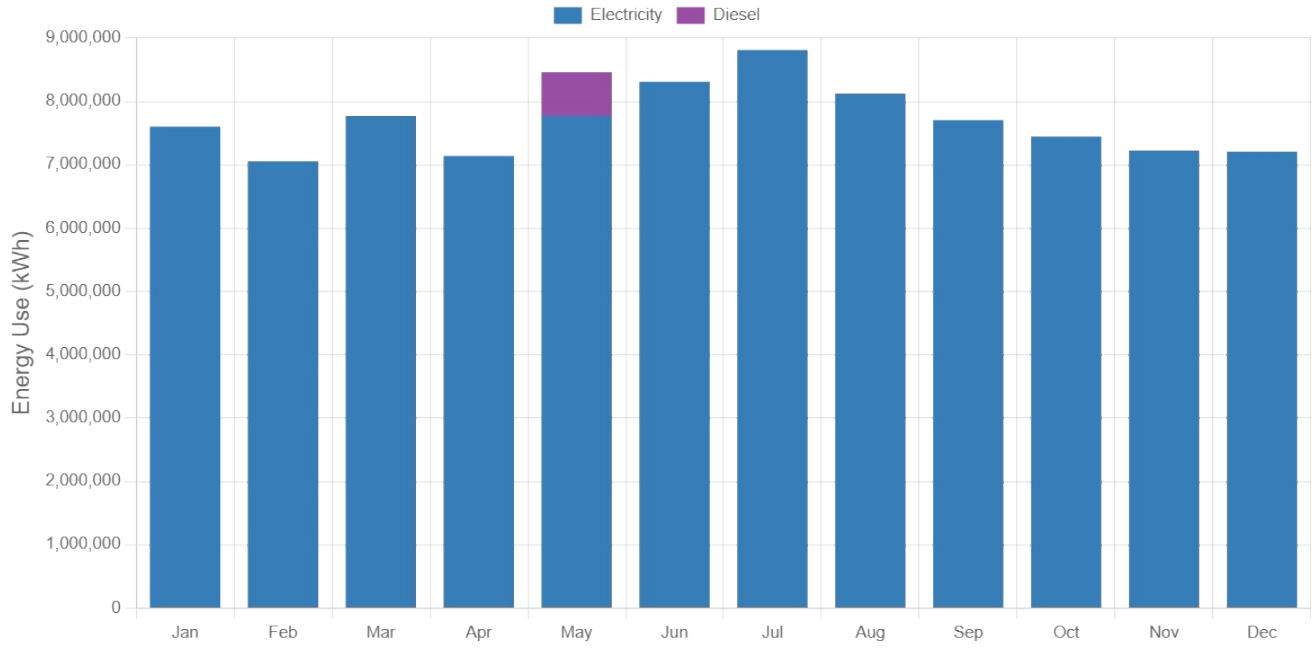

Monthly Utility Charge Breakdown

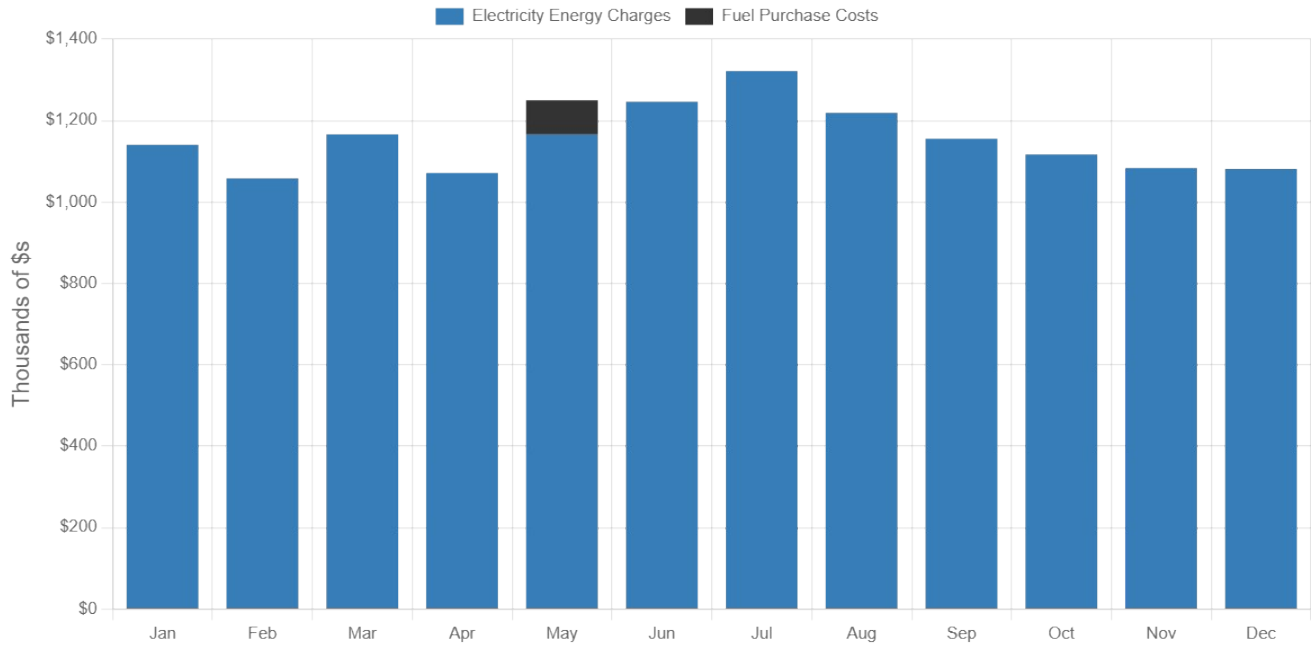

Utility Billing Period

Billing for Annual

Annual Summary of Charges

Electricity Energy Charges [$]	13,825,123
Electricity Monthly Fee [$]	0
Fuel Purchase Costs [$]	84,658
Total [$]	13,909,782
Reference [$]	21,370,537
Savings [$]	7,460,756

Annual Fuel Charges

Fuel Category	Consumption [kWh]	Rate [$/kWh]	Fuel Charge [$]
Diesel - Contracted	692,643	-	84,658
Fuel Subtotal [$]			84,658
Reference [$]			0
Savings [$]			-84,658

Annual Electricity Charges

Tariff	Energy Category	Consumption [kWh]	Rate [$/kWh]	Energy Charge [$]
NERC_Band_A_Lagos_Tariff	Period 1	92,167,489	-	13,825,123
Energy Subtotal [$]				13,825,123
Reference [$]				21,370,537
Savings [$]				7,545,414

Demand Category	Demand [kW]	Rate [$/kW]	Demand Charge [$]
Demand Subtotal [$]			0
Reference [$]			0
Savings [$]			0

Energy Balance and Technology Investments


This section provides data on system energy demand and portfolio technologies. Included are details on total annual demand for each end-use modeled, share of demand met by utility purchases and on-site DER assets, total capacities of existing and new DER assets, and upfront investment costs.

Annual Electricity Balance (kWh)




Total annual electricity purchase (kWh)	92,167,489
Total annual on-site generation from conventional DG (kWh)	263,204
Total annual on-site generation from renewables (kWh)	50,046,137
Total	**142,476,830**

Utility Balance (kWh)




Total annual electricity purchase (kWh)	92,167,489

Aggregated Demand (kWh)



Electricity-Only Demand	142,476,830

CO_2 Emissions (metric tons)



Diesel (DG)	176
Electricity	45,369
Total	**45,544**

Generation Technologies (kWh)

New Diesel Generator (kW) (7 units)	17,500
New Solar PV (kWdc)	41,444
Total	**58,944**


Investments

New Solar PV	$38,335,972
New Diesel Generator	$9,625,000
Total	**$47,960,972**

Annual PV Electricity Balance (kWh)

Electricity Consumed On-site	50,046,137
Electricity Curtailed	4,098,180
Total	**54,144,316**

CAPEX Breakdown ($)



Total Paid Upfront	$47,960,972
Total	**$47,960,972**


Space Used

Tech	Used / Available Space	%
Solar PV	192,764 / 929,023 m^2	20.70%

Electricity Dispatch

The following dispatch curves show the optimal system operation to meet all electricity loads on a selection of modeled days. Electricity dispatch shows both the electricity-only loads and any electricity used to operate cooling and/or refrigeration technologies. System operation includes on-site generation and storage dispatch, utility purchases, and load management strategies.

Electricity Dispatch for July, Week

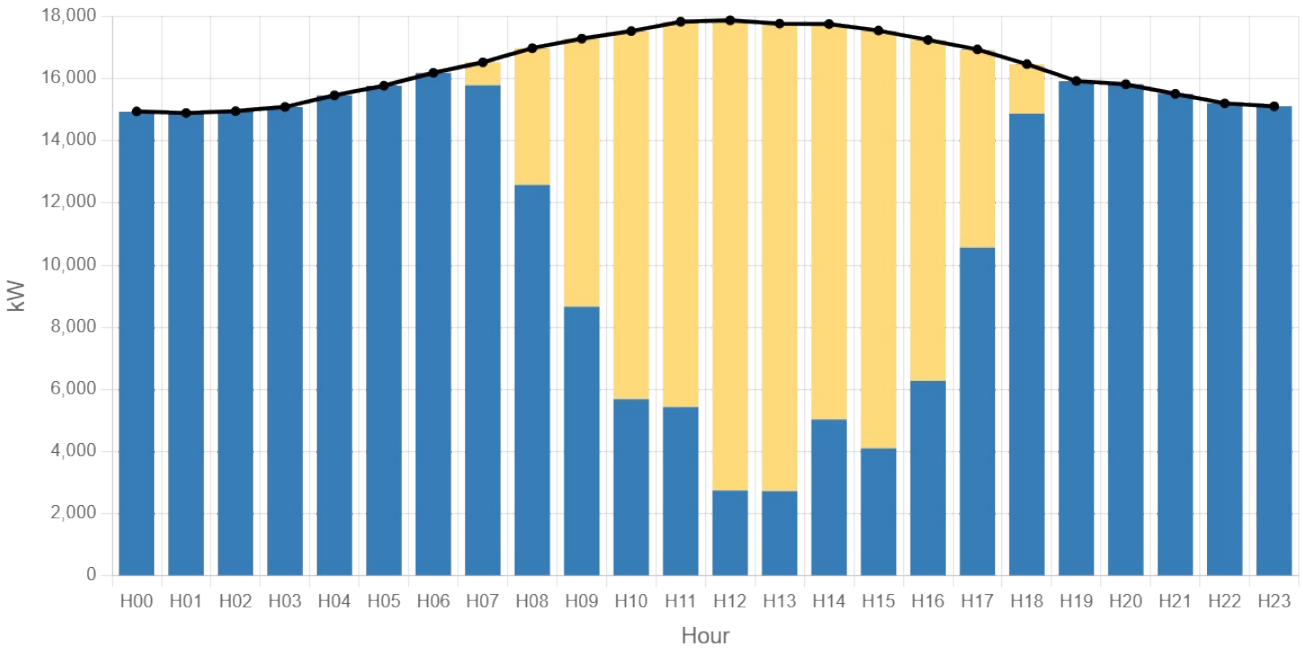


* Axes NOT Scaled on Dispatch Graph By Data Across All Months / Day Types

Operation Summary

This section provides a summary of generator operation and monthly on-site generation.

Generator Operation


Generator Operation for Annual

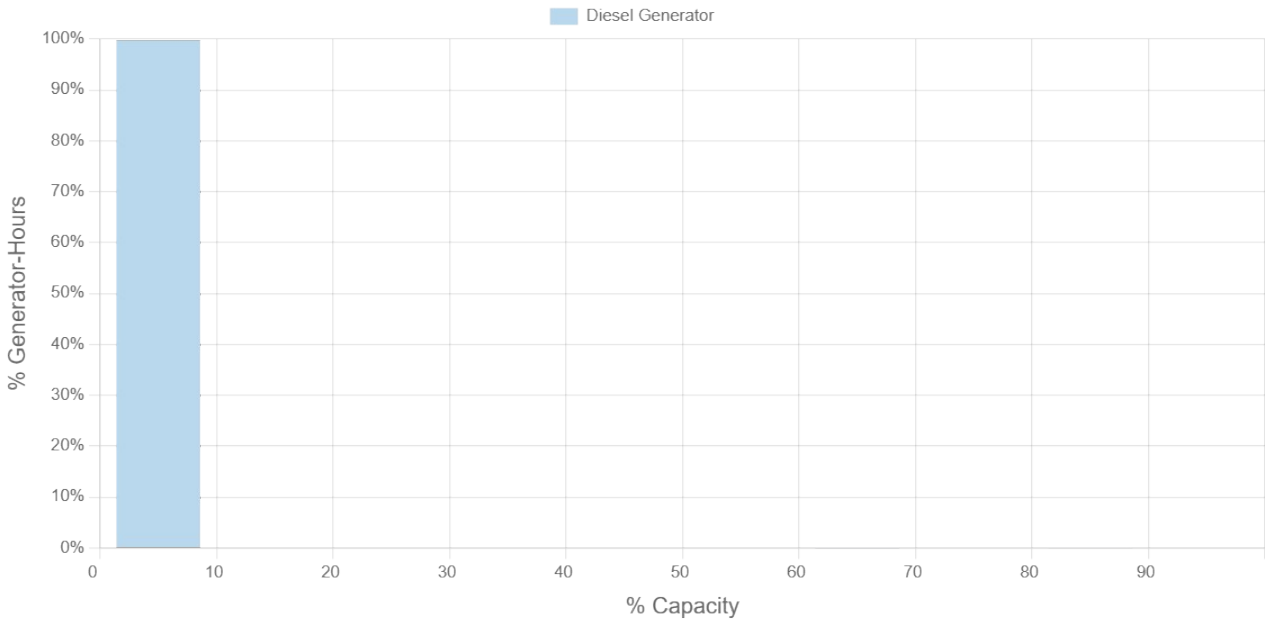


Generator Run Hours

Node	Tech	Annual Operation Hours
Utility Connection	Diesel Generator	22

Monthly On-Site Generation (kWh)

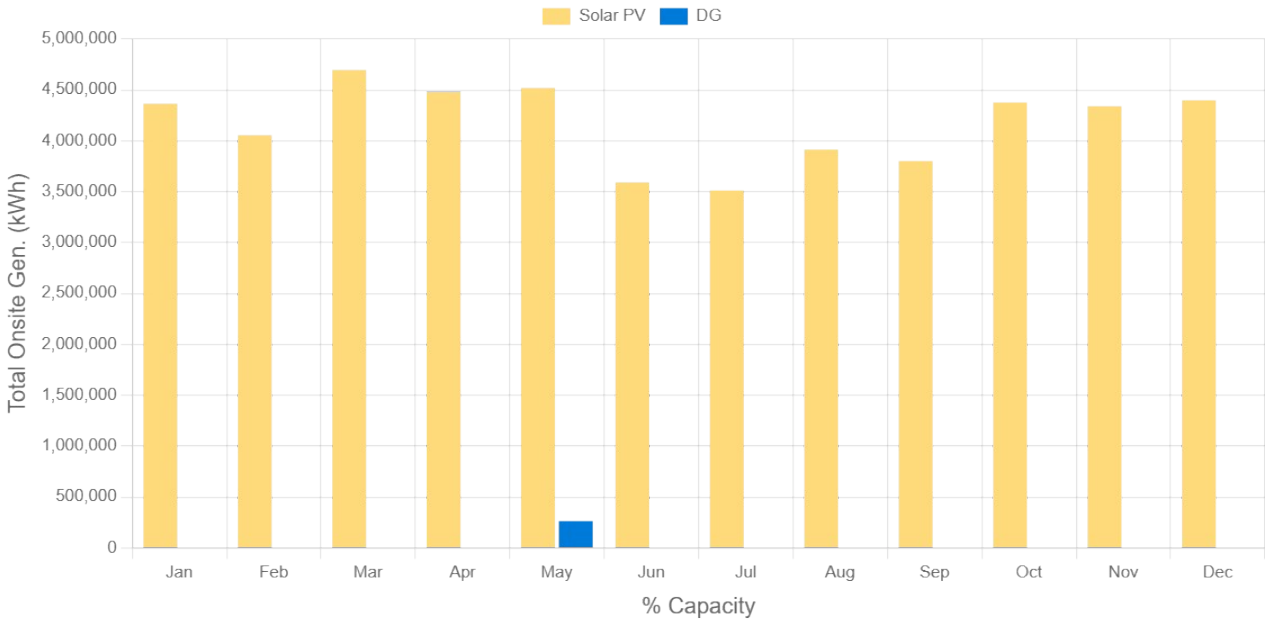

Monthly Emissions Summary

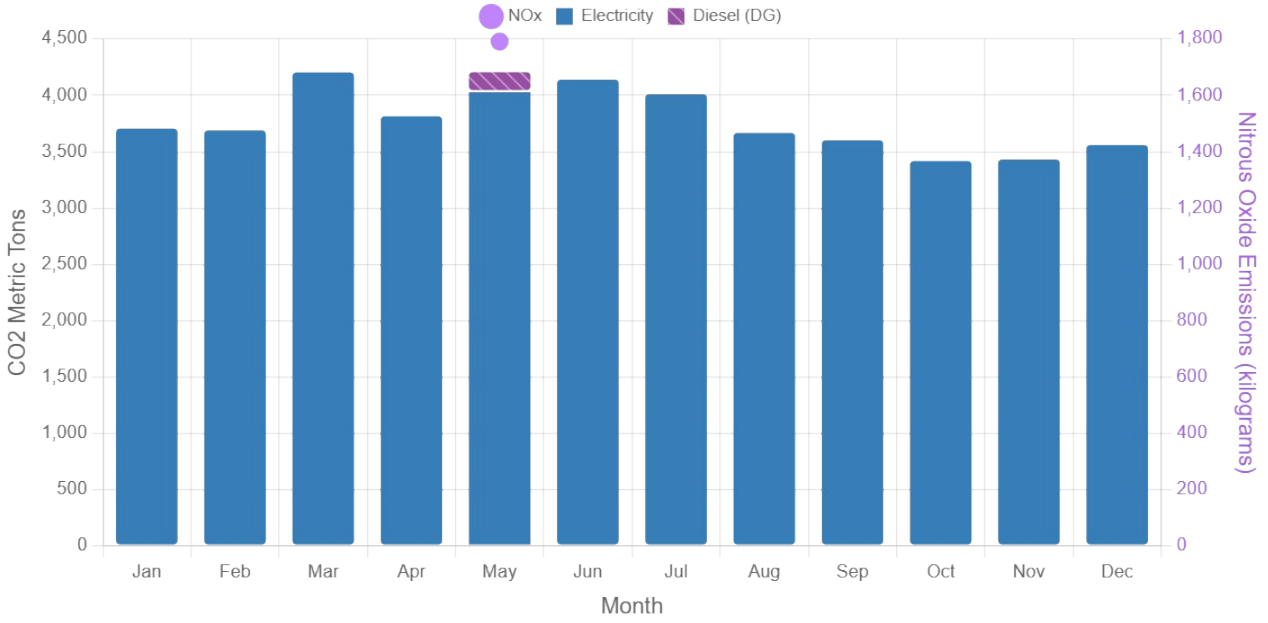

Technology Capacity Factor

Tech	Capacity Factor
Solar PV	13.78%
Diesel Generator	0.17%