Results Report for

AI_DataCenter_100MW_XENDEE



POWERED BY: XENDEE

Prepared by **Jamiu Dahunsi**

Created on **Thursday, November 5, 2026**

Table of Contents

Executive Summary **4**

Overview of Results **5**

Summary **7**

- Omitted Technologies 7
- Value Streams 7
- Annualized System Costs 7
- Costs and Savings Projection (Non-Discounted) 8

Financial Data **9**

- Microgrid Cost Breakdown 9
- ROI 9
- Cash Accrued 10
- Detailed Cash Flow: Cost 11
- Detailed Cash Flow: Savings 15

Utility Data **19**

- Monthly Demand 19
- Monthly Energy Consumption 20
- Monthly Utility Charge Breakdown 20
- Utility Billing Period 21

Energy Balance and Technology Investments **22**

- Annual Electricity Balance 22
- Utility Balance 22
- Aggregated Demand 23
- CO2 Emissions 23
- Generation Technologies 23
- Storage Technologies 24
- Investments 24
- Annual PV Electricity Balance 24
- CAPEX Breakdown 25
- Electric Technology Losses 25
- Space Used 25

Electricity Dispatch **26**

Operation Summary **27**
Battery Operations Summary 27
Generator Operation 27
Generator Run Hours 28
Monthly On-Site Generation 28
Monthly Emissions Summary 28
Technology Capacity Factor 29
Storage Cycling 29

4.96%
Internal Rate of Return

XENDEE

Model Input

AI_DataCenter_100MW_CFE
Lagos, Nigeria

Objectives

Minimize cost; Ride-through outage.

Financing

Interest Rate	**0.00 %**
Investment Tax Credit	**No**
MACRS	**No**

Energy Costs

Energy Price	**$0.15 / kWh**
Avg. Natural Gas Cost	**N/A**
Avg. Diesel Fuel Cost	**$1.3 / liter**
Reference LCOE	**$0.15 / kWh**

Demand Charges

Peak TOU Rate	**N/A**
Non-Coincident	**N/A**

Demand Characteristics

Peak Demand	**20 MW**
Annual Consumption	**142.5 GWh**
Schedulable EV	**N/A**

Financial Indicators for Investment

$-71,875,990	**$-32,795,990**	**13 Years**
Project NPV (at year 10)	Project NPV (at year 20)	Payback Period

Impact

$146.1M	**-15.6%**	**76.6%**
Upfront Capital Cost	Annual Cost Reductions	Emission Savings

	Total Annual System Costs (dollars in thousands)	Total Annual CO_2 Emissions (metric tons)
Reference	$21,370.5	73,451
Investment scenario (incl. annualized capital costs and electricity sales)	$24,710.9	17,180
Total Savings (%) (incl. annualized capital costs and electricity sales)	-15.6 %	76.6 %

Result	Value
Generation-Based Levelized Cost of Electricity ($ / kWh)	*optimized*: $0.1673 / kWh *reference*: $0.1500 / kWh
Load-Served Levelized Cost of Electricity ($ / kWh)	*optimized*: $0.1734 / kWh *reference*: $0.1500 / kWh
Opex Savings (%)	69.2537%
Break-Even Year	14 years
Payback Year	13 years
IRR at End of Project (%)	4.96%
NPV at End of Project	$-32,796k

Type	Total New Capacity	Technology (New Capacity)	Init. Equip. Cost
	97.3 MW	Solar PV (97.3 MW)	89,962 k$
	180.9 MWh	Battery Energy Storage System (180.9 MWh)	53,368 k$
	5 MW	Diesel Generator (5 MW) (2 units)	2,750 k$
			Total Cost: 146,080 k$

This optimization meets the following resiliency criteria:

The supplied load will ride-through the following electric utility outage(s):

- From **May 9 12:00 AM** through **May 11 11:59 PM**

This incurs a premium cost of **$3,340,344** compared to the reference case, which is **$2.73/kWh** met or **$46,393.67 per hour**.


Summary


Provided in this section is an overview of projected annual costs and savings over a twenty-year period. Annualized System Costs summarizes the annualized operational and investment costs of the optimized microgrid, and the Costs and Savings Projection (Non-Discounted) presents costs as upfront investment capital, yearly operational expenses, and accumulated savings based on results from the year optimized.

Omitted Technologies


All technologies that were considered were included in the solution.

Value Streams

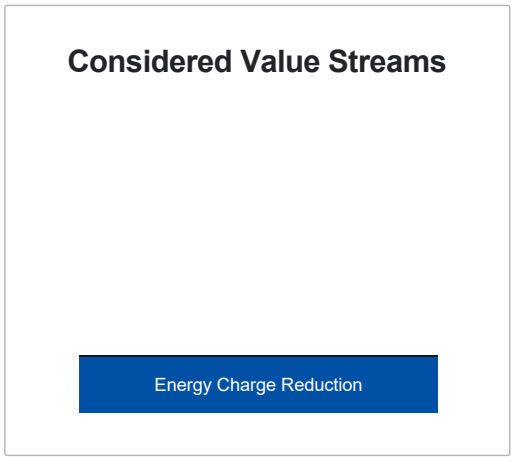

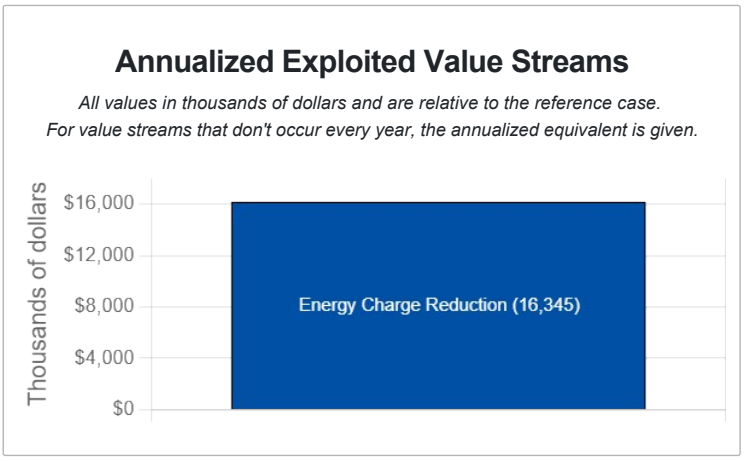


Annualized System Costs

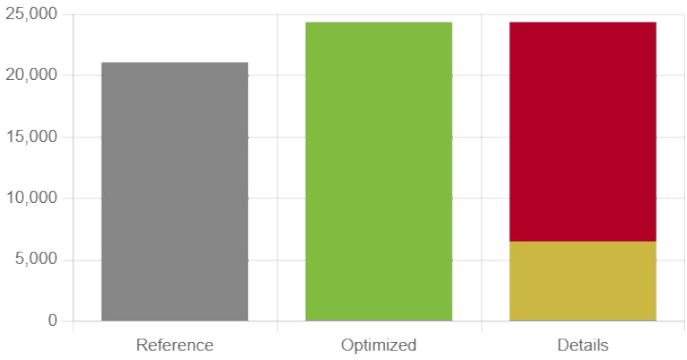

Reference	$21,371
Optimized - Total	$24,711
OPEX	$6,571
Annualized Investment Costs	$18,140

Costs and Savings Projection (Non-Discounted)

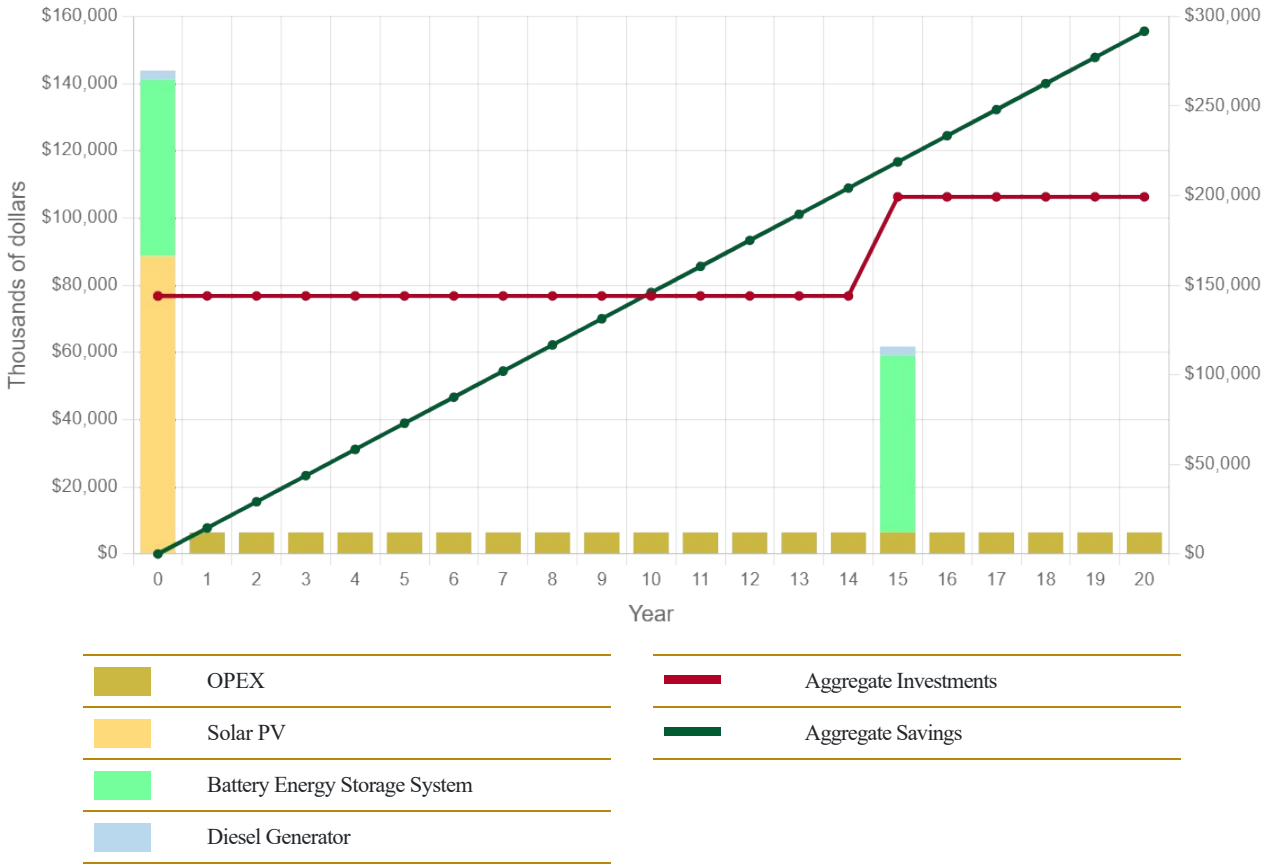


This is a non-discounted projection of the project costs and savings that assumes no changes in operation over time. Use the multi-year optimization feature to examine changes in investment and savings over time.

Note that incentives and grant funding are not included in this chart. Additionally, CAPEX are presented as the total investment costs in the year(s) corresponding to installation and/or replacement. Therefore, depending on the financing method and incentives modeled, the year when Aggregate Savings exceeds Aggregate Investments in the Costs and Savings Projection is not expected to line up with the Payback Period in the Detailed Cashflow Table.


Financial Data

Primary financial indicators are provided in this section to facilitate assessing project returns. Return on investment (ROI), Net Present Value (NPV), and Internal Rate of Return (IRR) are calculated and graphed for each year leading out to twenty years from project implementation, providing insight on returns at different timelines. Also included is a detailed cash flow table.


Microgrid Cost Breakdown

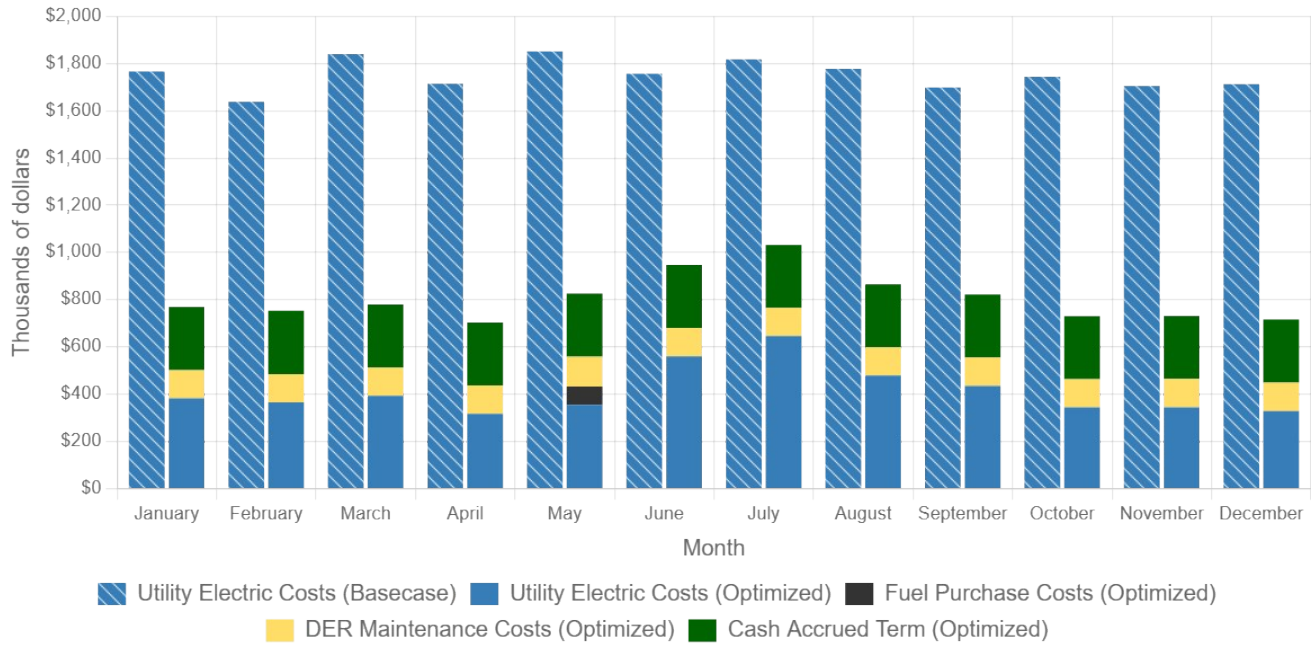

ROI

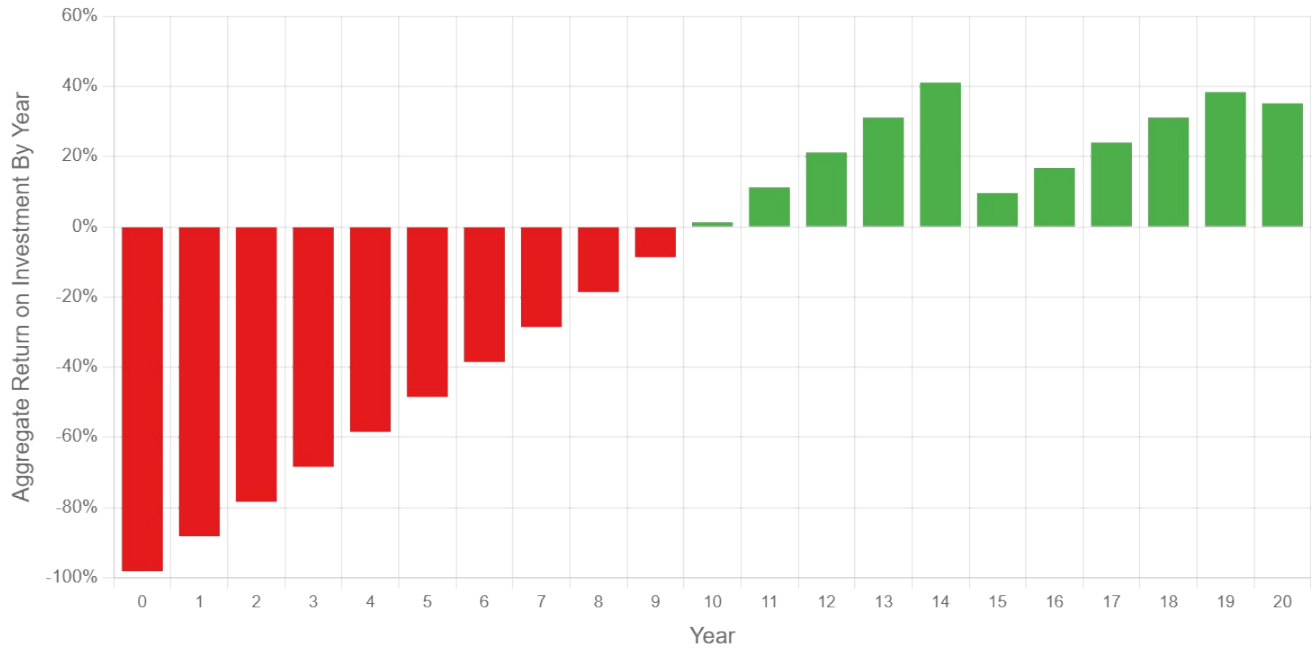

Cash Accrued

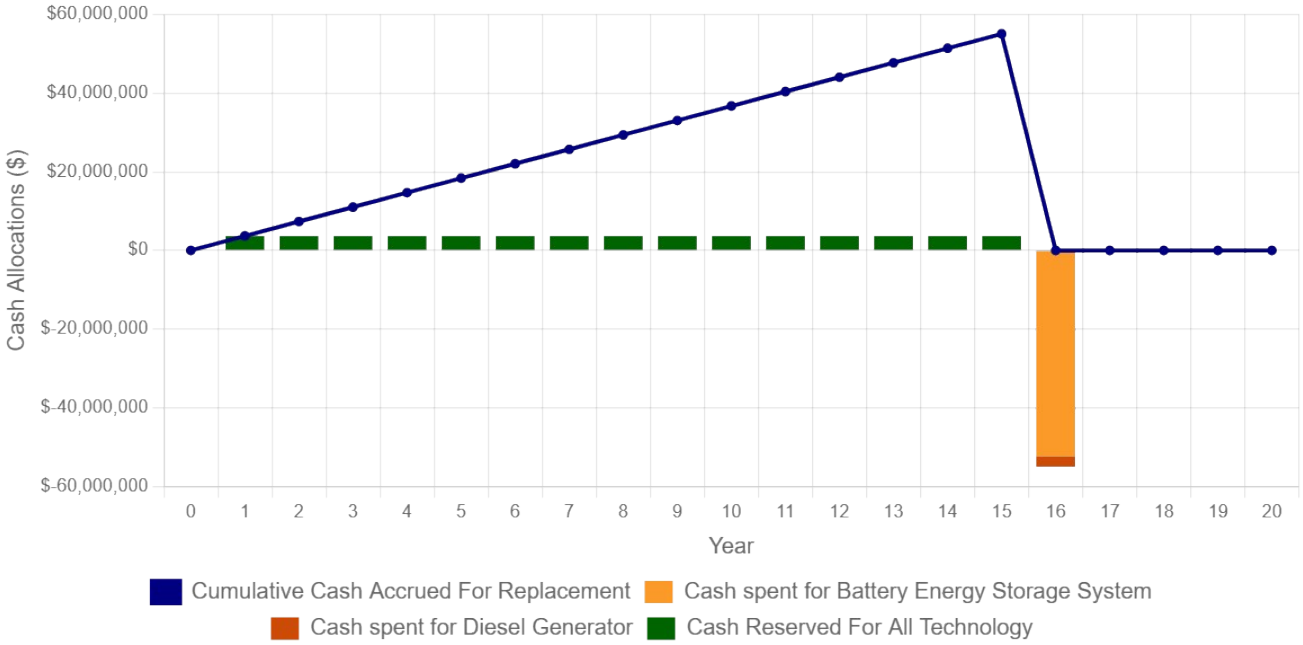

Detailed Cash Flow: Cost

(thousands of dollars)

The cost cashflow table below displays the **costs to run the system,** not relative to any reference. The lines shown are the costs that the solution is subject to. A positive value is a revenue while a negative is a cost. The sum of the individual cost terms is used to calculate the system **net present costs.**

	Year 0	Year 1	Year 2	Year 3	Year 4	Year 5
Utility Energy Charges	0.0	-5,025.7	-5,025.7	-5,025.7	-5,025.7	-5,025.7
Fuel Purchase Costs	0.0	-79.6	-79.6	-79.6	-79.6	-79.6
DER Maintenance Costs	0.0	-1,465.4	-1,465.4	-1,465.4	-1,465.4	-1,465.4
Total OPEX Costs	0.0	-6,570.7	-6,570.7	-6,570.7	-6,570.7	-6,570.7
CAPEX for Solar PV	-89,962.0	0.0	0.0	0.0	0.0	0.0
CAPEX for Battery Energy Storage System	-53,368.4	0.0	0.0	0.0	0.0	0.0
CAPEX for Diesel Generator	-2,750.0	0.0	0.0	0.0	0.0	0.0
Total CAPEX costs	-146,080.5	0.0	0.0	0.0	0.0	0.0
Replacement Cost for Battery Energy Storage System	0.0	-3,557.9	-3,557.9	-3,557.9	-3,557.9	-3,557.9
Replacement Cost for Diesel Generator	0.0	-183.3	-183.3	-183.3	-183.3	-183.3
Total Replacement Costs	0.0	-3,741.2	-3,741.2	-3,741.2	-3,741.2	-3,741.2
Net Annual Cost (*Non-discounted*)	-146,080.5	-10,311.9	-10,311.9	-10,311.9	-10,311.9	-10,311.9
Net Annual Cost (*Discounted*)	-146,080.5	-9,548.0	-8,840.8	-8,185.9	-7,579.5	-7,018.1
Net Present Cost	**-146,080.5**	**-155,628.5**	**-164,469.3**	**-172,655.2**	**-180,234.7**	**-187,252.8**
Cumulative Cost (*Non-discounted*)	**-146,080.5**	**-156,392.4**	**-166,704.2**	**-177,016.1**	**-187,328.0**	**-197,639.9**
Cumulative Cost (*Discounted*)	**-146,080.5**	**-144,807.7**	**-142,922.0**	**-140,521.1**	**-137,691.7**	**-134,510.4**

	Year 6	Year 7	Year 8	Year 9	Year 10	Year 11
Utility Energy Charges	-5,025.7	-5,025.7	-5,025.7	-5,025.7	-5,025.7	-5,025.7
Fuel Purchase Costs	-79.6	-79.6	-79.6	-79.6	-79.6	-79.6
DER Maintenance Costs	-1,465.4	-1,465.4	-1,465.4	-1,465.4	-1,465.4	-1,465.4
Total OPEX Costs	-6,570.7	-6,570.7	-6,570.7	-6,570.7	-6,570.7	-6,570.7
CAPEX for Solar PV	0.0	0.0	0.0	0.0	0.0	0.0
CAPEX for Battery Energy Storage System	0.0	0.0	0.0	0.0	0.0	0.0
CAPEX for Diesel Generator	0.0	0.0	0.0	0.0	0.0	0.0
Total CAPEX costs	0.0	0.0	0.0	0.0	0.0	0.0
Replacement Cost for Battery Energy Storage System	-3,557.9	-3,557.9	-3,557.9	-3,557.9	-3,557.9	-3,557.9
Replacement Cost for Diesel Generator	-183.3	-183.3	-183.3	-183.3	-183.3	-183.3
Total Replacement Costs	-3,741.2	-3,741.2	-3,741.2	-3,741.2	-3,741.2	-3,741.2
Net Annual Cost (*Non-discounted*)	-10,311.9	-10,311.9	-10,311.9	-10,311.9	-10,311.9	-10,311.9
Net Annual Cost (*Discounted*)	-6,498.2	-6,016.9	-5,571.2	-5,158.5	-4,776.4	-4,422.6
Net Present Cost	**-193,751.1**	**-199,767.9**	**-205,339.1**	**-210,497.6**	**-215,274.0**	**-219,696.6**
Cumulative Cost (*Non-discounted*)	**-207,951.8**	**-218,263.6**	**-228,575.5**	**-238,887.4**	**-249,199.3**	**-259,511.2**
Cumulative Cost (*Discounted*)	**-131,044.9**	**-127,354.7**	**-123,492.2**	**-119,503.2**	**-115,427.5**	**-111,299.9**

	Year 12	Year 13	Year 14	Year 15	Year 16	Year 17
Utility Energy Charges	-5,025.7	-5,025.7	-5,025.7	-5,025.7	-5,025.7	-5,025.7
Fuel Purchase Costs	-79.6	-79.6	-79.6	-79.6	-79.6	-79.6
DER Maintenance Costs	-1,465.4	-1,465.4	-1,465.4	-1,465.4	-1,465.4	-1,465.4
Total OPEX Costs	-6,570.7	-6,570.7	-6,570.7	-6,570.7	-6,570.7	-6,570.7
CAPEX for Solar PV	0.0	0.0	0.0	0.0	0.0	0.0
CAPEX for Battery Energy Storage System	0.0	0.0	0.0	0.0	0.0	0.0
CAPEX for Diesel Generator	0.0	0.0	0.0	0.0	0.0	0.0
Total CAPEX costs	0.0	0.0	0.0	0.0	0.0	0.0
Replacement Cost for Battery Energy Storage System	-3,557.9	-3,557.9	-3,557.9	-3,557.9	0.0	0.0
Replacement Cost for Diesel Generator	-183.3	-183.3	-183.3	-183.3	0.0	0.0
Total Replacement Costs	-3,741.2	-3,741.2	-3,741.2	-3,741.2	0.0	0.0
Net Annual Cost (*Non-discounted*)	-10,311.9	-10,311.9	-10,311.9	-10,311.9	-6,570.7	-6,570.7
Net Annual Cost (*Discounted*)	-4,095.0	-3,791.7	-3,510.8	-3,250.7	-1,917.9	-1,775.8
Net Present Cost	**-223,791.6**	**-227,583.3**	**-231,094.1**	**-234,344.8**	**-236,262.7**	**-238,038.6**
Cumulative Cost (*Non-discounted*)	**-269,823.1**	**-280,134.9**	**-290,446.8**	**-300,758.7**	**-307,329.3**	**-313,900.0**
Cumulative Cost (*Discounted*)	**-107,150.4**	**-103,005.0**	**-98,885.8**	**-94,811.7**	**-89,706.5**	**-84,837.4**

	Year 18	Year 19	Year 20
Utility Energy Charges	-5,025.7	-5,025.7	-5,025.7
Fuel Purchase Costs	-79.6	-79.6	-79.6
DER Maintenance Costs	-1,465.4	-1,465.4	-1,465.4
Total OPEX Costs	-6,570.7	-6,570.7	-6,570.7
CAPEX for Solar PV	0.0	0.0	0.0
CAPEX for Battery Energy Storage System	0.0	0.0	0.0
CAPEX for Diesel Generator	0.0	0.0	0.0
Total CAPEX costs	0.0	0.0	0.0
Replacement Cost for Battery Energy Storage System	0.0	0.0	0.0
Replacement Cost for Diesel Generator	0.0	0.0	0.0
Total Replacement Costs	0.0	0.0	0.0
Net Annual Cost (*Non-discounted*)	-6,570.7	-6,570.7	-6,570.7
Net Annual Cost (*Discounted*)	-1,644.3	-1,522.5	-1,409.7
Net Present Cost	**-239,682.9**	**-241,205.4**	**-242,615.1**
Cumulative Cost (*Non-discounted*)	**-320,470.6**	**-327,041.3**	**-333,612.0**
Cumulative Cost (*Discounted*)	**-80,197.5**	**-75,779.4**	**-71,575.9**

Detailed Cash Flow: Savings

(thousands of dollars)

The Savings cashflow table below displays the **savings the system produces relative to the reference.** The lines shown are the savings that the solution creates. A positive value is a savings while a negative is a loss. The sum of the individual savings terms is used to calculate the **net present value** of the system.

	Year 0	Year 1	Year 2	Year 3	Year 4	Year 5
Savings: Utility Energy Charges	0.0	16,344.9	16,344.9	16,344.9	16,344.9	16,344.9
Savings: Fuel Purchase Costs	0.0	-79.6	-79.6	-79.6	-79.6	-79.6
Savings: DER Maintenance Costs	0.0	-1,465.4	-1,465.4	-1,465.4	-1,465.4	-1,465.4
Total OPEX Savings	0.0	14,799.9	14,799.9	14,799.9	14,799.9	14,799.9
CAPEX difference for Solar PV	-89,962.0	0.0	0.0	0.0	0.0	0.0
CAPEX difference for Battery Energy Storage System	-53,368.4	0.0	0.0	0.0	0.0	0.0
CAPEX difference for Diesel Generator	-2,750.0	0.0	0.0	0.0	0.0	0.0
Total CAPEX Difference	-146,080.5	0.0	0.0	0.0	0.0	0.0
Replacement Cost Difference for Battery Energy Storage System	0.0	-3,557.9	-3,557.9	-3,557.9	-3,557.9	-3,557.9
Replacement Cost Difference for Diesel Generator	0.0	-183.3	-183.3	-183.3	-183.3	-183.3
Total Replacement Costs Difference	0.0	-3,741.2	-3,741.2	-3,741.2	-3,741.2	-3,741.2
Net Annual Cash Flow (*Non-discounted*)	-146,080.5	11,058.7	11,058.7	11,058.7	11,058.7	11,058.7
Net Annual Cash Flow (*Discounted*)	-146,080.5	10,239.5	9,481.0	8,778.7	8,128.4	7,526.3
Net Present Value	**-146,080.5**	**-135,841.0**	**-126,360.0**	**-117,581.3**	**-109,452.8**	**-101,926.5**
Cumulative Cash Flow (*Non-discounted*)	**-146,080.5**	**-135,021.8**	**-123,963.2**	**-112,904.5**	**-101,845.9**	**-90,787.2**
Cumulative Cash Flow (*Discounted*)	**-146,080.5**	**-125,020.2**	**-106,278.4**	**-89,627.2**	**-74,859.7**	**-61,788.2**

	Year 6	Year 7	Year 8	Year 9	Year 10	Year 11
Savings: Utility Energy Charges	16,344.9	16,344.9	16,344.9	16,344.9	16,344.9	16,344.9
Savings: Fuel Purchase Costs	-79.6	-79.6	-79.6	-79.6	-79.6	-79.6
Savings: DER Maintenance Costs	-1,465.4	-1,465.4	-1,465.4	-1,465.4	-1,465.4	-1,465.4
Total OPEX Savings	14,799.9	14,799.9	14,799.9	14,799.9	14,799.9	14,799.9
CAPEX difference for Solar PV	0.0	0.0	0.0	0.0	0.0	0.0
CAPEX difference for Battery Energy Storage System	0.0	0.0	0.0	0.0	0.0	0.0
CAPEX difference for Diesel Generator	0.0	0.0	0.0	0.0	0.0	0.0
Total CAPEX Difference	0.0	0.0	0.0	0.0	0.0	0.0
Replacement Cost Difference for Battery Energy Storage System	-3,557.9	-3,557.9	-3,557.9	-3,557.9	-3,557.9	-3,557.9
Replacement Cost Difference for Diesel Generator	-183.3	-183.3	-183.3	-183.3	-183.3	-183.3
Total Replacement Costs Difference	-3,741.2	-3,741.2	-3,741.2	-3,741.2	-3,741.2	-3,741.2
Net Annual Cash Flow (*Non-discounted*)	11,058.7	11,058.7	11,058.7	11,058.7	11,058.7	11,058.7
Net Annual Cash Flow (*Discounted*)	6,968.8	6,452.6	5,974.7	5,532.1	5,122.3	4,742.9
Net Present Value	**-94,957.6**	**-88,505.0**	**-82,530.4**	**-76,998.3**	**-71,876.0**	**-67,133.1**
Cumulative Cash Flow (*Non-discounted*)	**-79,728.5**	**-68,669.9**	**-57,611.2**	**-46,552.6**	**-35,493.9**	**-24,435.3**
Cumulative Cash Flow (*Discounted*)	**-50,242.5**	**-40,068.2**	**-31,125.6**	**-23,287.9**	**-16,440.6**	**-10,479.9**

	Year 12	Year 13	Year 14	Year 15	Year 16	Year 17
Savings: Utility Energy Charges	16,344.9	16,344.9	16,344.9	16,344.9	16,344.9	16,344.9
Savings: Fuel Purchase Costs	-79.6	-79.6	-79.6	-79.6	-79.6	-79.6
Savings: DER Maintenance Costs	-1,465.4	-1,465.4	-1,465.4	-1,465.4	-1,465.4	-1,465.4
Total OPEX Savings	14,799.9	14,799.9	14,799.9	14,799.9	14,799.9	14,799.9
CAPEX difference for Solar PV	0.0	0.0	0.0	0.0	0.0	0.0
CAPEX difference for Battery Energy Storage System	0.0	0.0	0.0	0.0	0.0	0.0
CAPEX difference for Diesel Generator	0.0	0.0	0.0	0.0	0.0	0.0
Total CAPEX Difference	0.0	0.0	0.0	0.0	0.0	0.0
Replacement Cost Difference for Battery Energy Storage System	-3,557.9	-3,557.9	-3,557.9	-3,557.9	0.0	0.0
Replacement Cost Difference for Diesel Generator	-183.3	-183.3	-183.3	-183.3	0.0	0.0
Total Replacement Costs Difference	-3,741.2	-3,741.2	-3,741.2	-3,741.2	0.0	0.0
Net Annual Cash Flow (*Non-discounted*)	11,058.7	11,058.7	11,058.7	11,058.7	14,799.9	14,799.9
Net Annual Cash Flow (*Discounted*)	4,391.5	4,066.3	3,765.0	3,486.2	4,320.0	4,000.0
Net Present Value	**-62,741.6**	**-58,675.3**	**-54,910.3**	**-51,424.1**	**-47,104.2**	**-43,104.3**
Cumulative Cash Flow (*Non-discounted*)	**-13,376.6**	**-2,317.9**	**8,740.7**	**19,799.4**	**34,599.3**	**49,399.1**
Cumulative Cash Flow (*Discounted*)	**-5,312.0**	**-852.3**	**2,975.9**	**6,241.6**	**10,099.2**	**13,351.1**

	Year 18	Year 19	Year 20
Savings: Utility Energy Charges	16,344.9	16,344.9	16,344.9
Savings: Fuel Purchase Costs	-79.6	-79.6	-79.6
Savings: DER Maintenance Costs	-1,465.4	-1,465.4	-1,465.4
Total OPEX Savings	14,799.9	14,799.9	14,799.9
CAPEX difference for Solar PV	0.0	0.0	0.0
CAPEX difference for Battery Energy Storage System	0.0	0.0	0.0
CAPEX difference for Diesel Generator	0.0	0.0	0.0
Total CAPEX Difference	0.0	0.0	0.0
Replacement Cost Difference for Battery Energy Storage System	0.0	0.0	0.0
Replacement Cost Difference for Diesel Generator	0.0	0.0	0.0
Total Replacement Costs Difference	0.0	0.0	0.0
Net Annual Cash Flow (*Non-discounted*)	14,799.9	14,799.9	14,799.9
Net Annual Cash Flow (*Discounted*)	3,703.7	3,429.3	3,175.3
Net Present Value	**-39,400.6**	**-35,971.3**	**-32,796.0**
Cumulative Cash Flow (*Non-discounted*)	**64,199.0**	**78,998.9**	**93,798.8**
Cumulative Cash Flow (*Discounted*)	**16,065.7**	**18,305.0**	**20,124.4**


Utility Data

This section provides a summary of electricity and fuel utility purchases. Monthly breakdowns of energy consumption [kWh], demand by time-of-use period [kW], and total charges [k$] are included.


Monthly Demand (kW)



Monthly Energy Consumption (kWh)

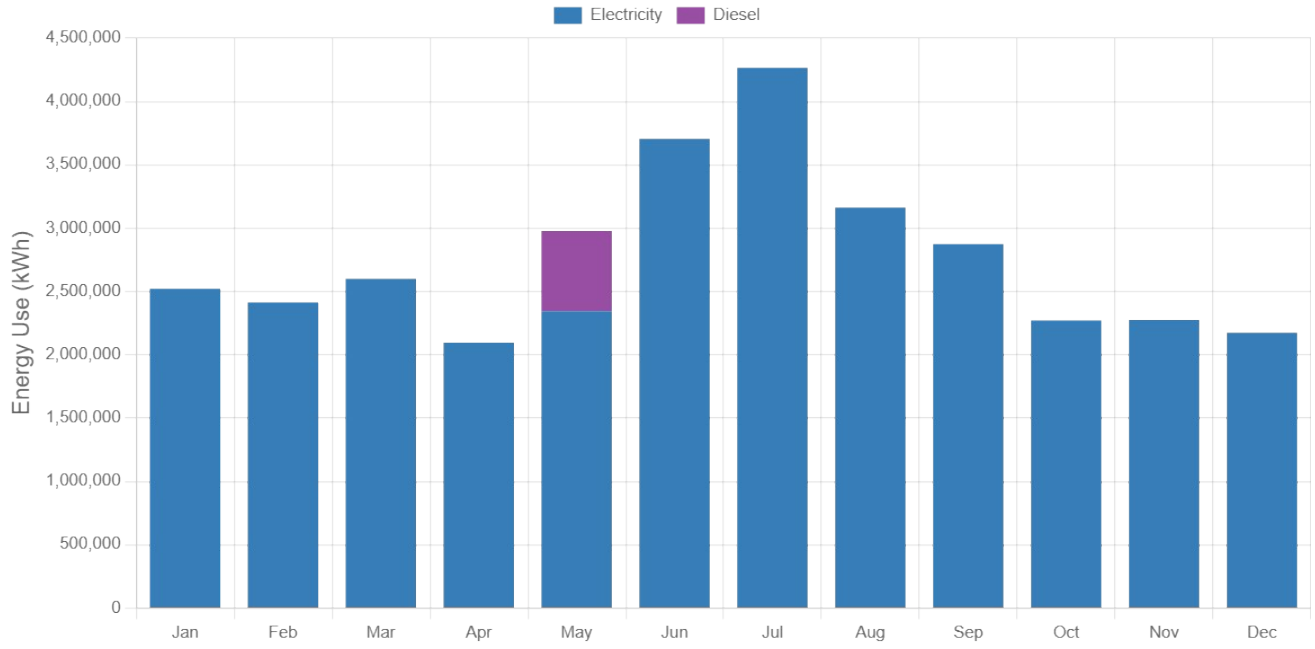

Monthly Utility Charge Breakdown

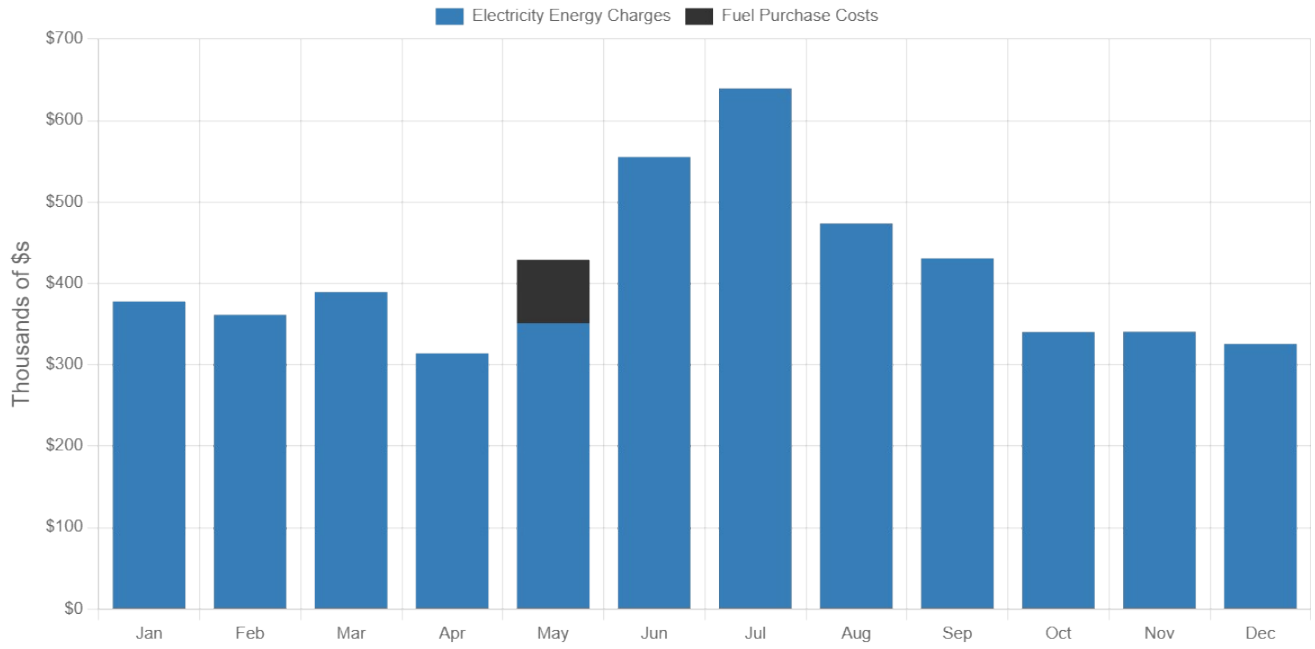

Utility Billing Period

Billing for Annual

Annual Summary of Charges

Electricity Energy Charges [$]	5,025,688
Electricity Monthly Fee [$]	0
Fuel Purchase Costs [$]	79,607
Total [$]	5,105,295
Reference [$]	21,370,537
Savings [$]	16,265,243

Annual Fuel Charges

Fuel Category	Consumption [kWh]	Rate [$/kWh]	Fuel Charge [$]
Diesel - Contracted	651,316	-	79,607
Fuel Subtotal [$]			79,607
Reference [$]			0
Savings [$]			-79,607

Annual Electricity Charges

Tariff	Energy Category	Consumption [kWh]	Rate [$/kWh]	Energy Charge [$]
NERC_Band_A_Lagos_Tariff	Period 1	33,504,585	-	5,025,688
Energy Subtotal [$]				5,025,688
Reference [$]				21,370,537
Savings [$]				16,344,850

Demand Category	Demand [kW]	Rate [$/kW]	Demand Charge [$]
Demand Subtotal [$]			0
Reference [$]			0
Savings [$]			0

Energy Balance and Technology Investments


This section provides data on system energy demand and portfolio technologies. Included are details on total annual demand for each end-use modeled, share of demand met by utility purchases and on-site DER assets, total capacities of existing and new DER assets, and upfront investment costs.

Annual Electricity Balance (kWh)



Total annual electricity purchase (kWh)	33,504,585
Total annual on-site generation from conventional DG (kWh)	247,500
Total annual on-site generation from renewables (kWh)	113,986,141
Total	**147,738,226**

Utility Balance (kWh)




Total annual electricity purchase (kWh)	33,504,585

Aggregated Demand (kWh)



Electricity-Only Demand	142,482,676

CO_2 Emissions (metric tons)




Diesel (DG)	165
Electricity	17,015
Total	**17,180**

Generation Technologies (kWh)

New Diesel Generator (kW) (2 units)	5,000
New Solar PV (kWdc)	97,256
Total	**102,256**


Storage Technologies



New Battery Energy Storage System Capacity (kWh)	180,910
Total	**180,910**

Tech	Inverter Size (kW): Calc. / Specified	Ratio
Battery Energy Storage System	39,950 / 45,227	0.88

Investments




New Solar PV	$89,962,043
New Battery Energy Storage System	$53,368,434
New Diesel Generator	$2,750,000
Total	**$146,080,477**

Annual PV Electricity Balance (kWh)


Electricity Consumed On-site	113,986,141
Electricity Curtailed	12,947,275
Total	**126,933,416**

CAPEX Breakdown ($)



Total Paid Upfront	$146,080,477
Total	**$146,080,477**

Electric Technology Losses (kWh)



Electric Battery Charging	2,700,794
Electric Battery Discharging	2,566,333
Electric Battery Standby	99,984


Space Used

Tech	Used / Available Space	%
Solar PV	452,355 / 929,023 m^2	48.70%

Electricity Dispatch

The following dispatch curves show the optimal system operation to meet all electricity loads on a selection of modeled days. Electricity dispatch shows both the electricity-only loads and any electricity used to operate cooling and/or refrigeration technologies. System operation includes on-site generation and storage dispatch, utility purchases, and load management strategies.

Electricity Dispatch for July, Week

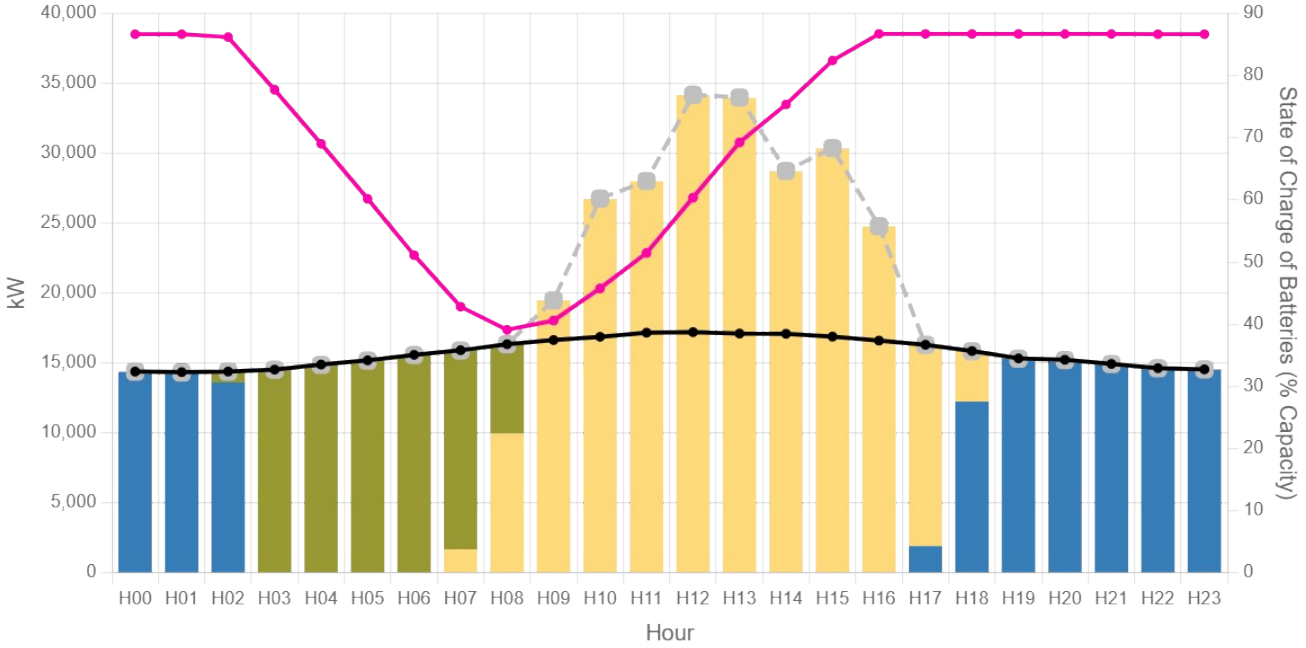

Demand lines are stacked to show the cumulative impact.


- Electricity-Only Load
- Electricity Supplied to Storage
- Utility Purchase
- Solar PV for Self Consumption
- Battery Energy Storage System for Self Consumption
- Diesel Generator for Self Consumption
- Solar PV Curtailment
- State of Charge of Battery Energy Storage System

* Axes NOT Scaled on Dispatch Graph By Data Across All Months / Day Types

Operation Summary


This section provides a summary of generator operation and monthly on-site generation.

Battery Operations Summary

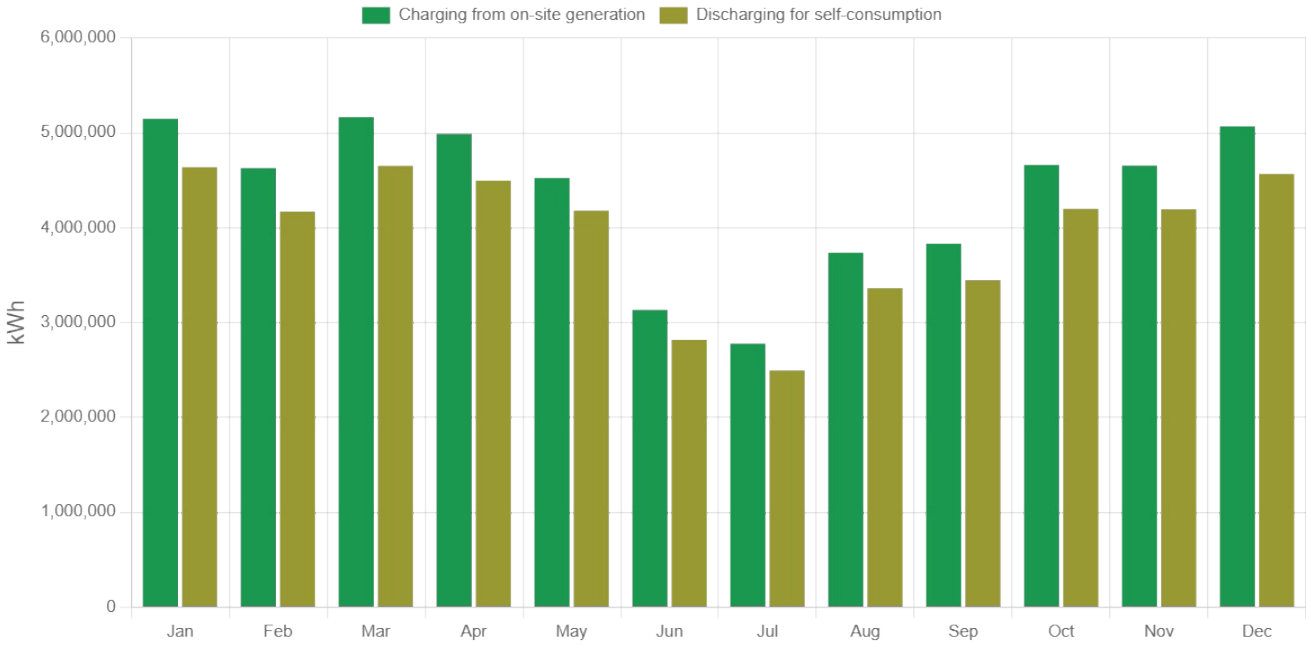

Generator Operation


Generator Operation for Annual

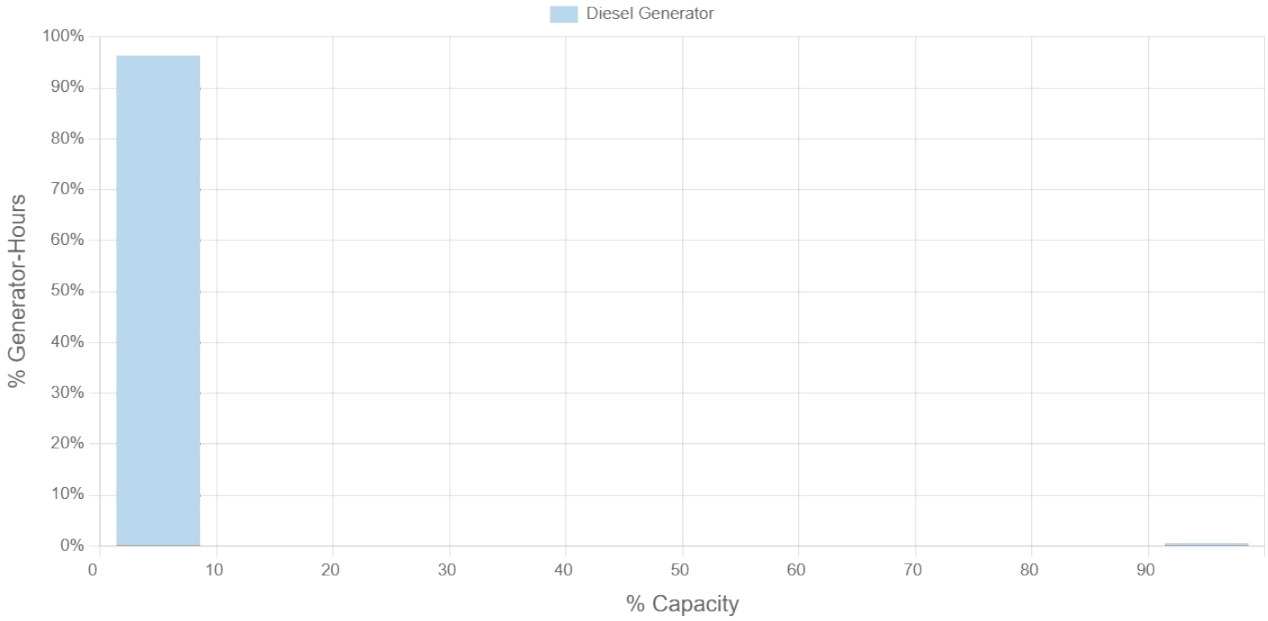


Generator Run Hours

Node	Tech	Annual Operation Hours
Utility Connection	Diesel Generator	51

Monthly On-Site Generation (kWh)

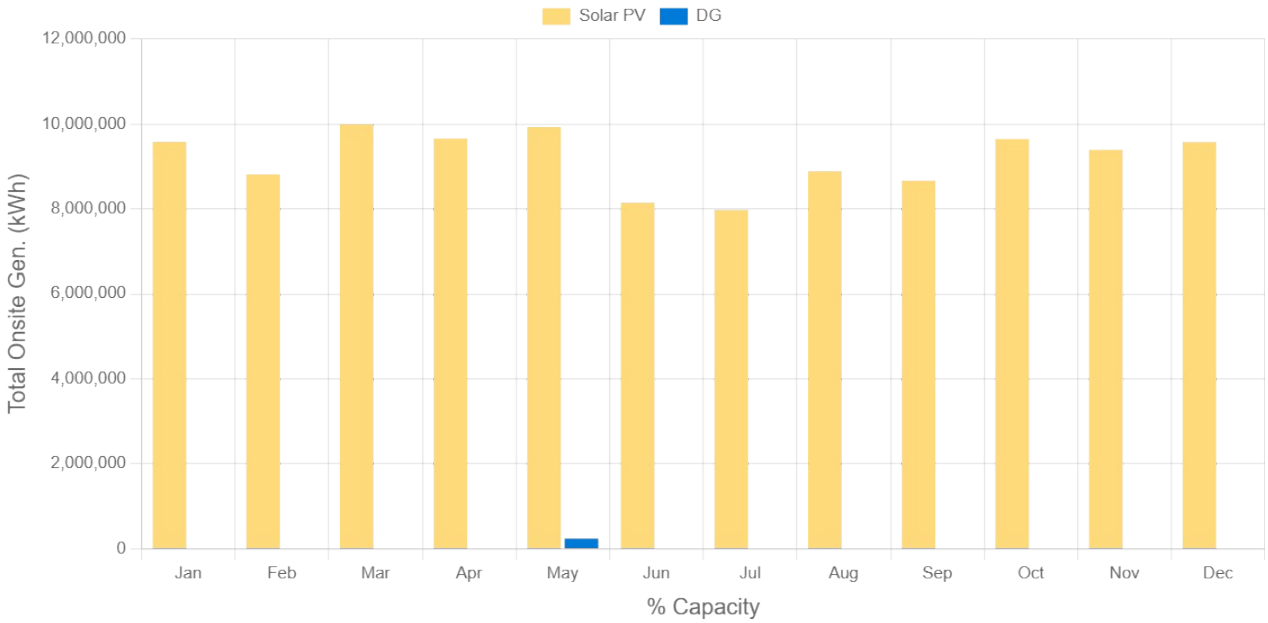

Monthly Emissions Summary

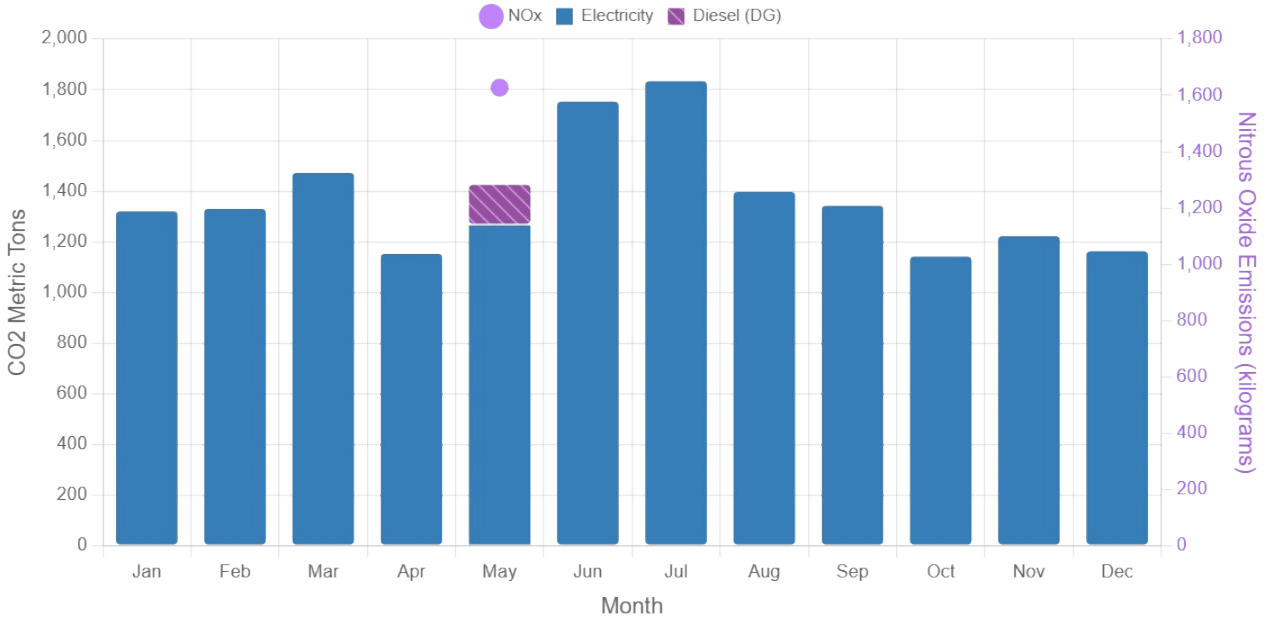

Technology Capacity Factor

Tech	Capacity Factor
Solar PV	13.38%
Diesel Generator	0.57%

Storage Cycling

Tech	Annual / Allowed Cycles	%
Battery Energy Storage System	284 / N/A	N/A